

LOC I-JDP

108.7

APP CRS

276°

Rwy Ldg

12000

TDZE

875

Apt Elev

896

ILS or LOC RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. From FISBU, BREWZ, ZALED or YEYUP.

RADAR required for procedure entry at KAYDE.

▼

For inop ALS, increase S-LOC 27 Cat C/D visibility to 1¾ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct FLM VOR/DME and hold.

D-ATIS

134.375

CINCINNATI APP CON

119.7 363.15 (090°-269°)

123.875 363.15 (270°-089°)

CINCINNATI TOWER


118.975 360.85 (18L/36R)

118.3 (9/27, 18C/36C)

133.325 (18R/36L)

GND CON

121.7

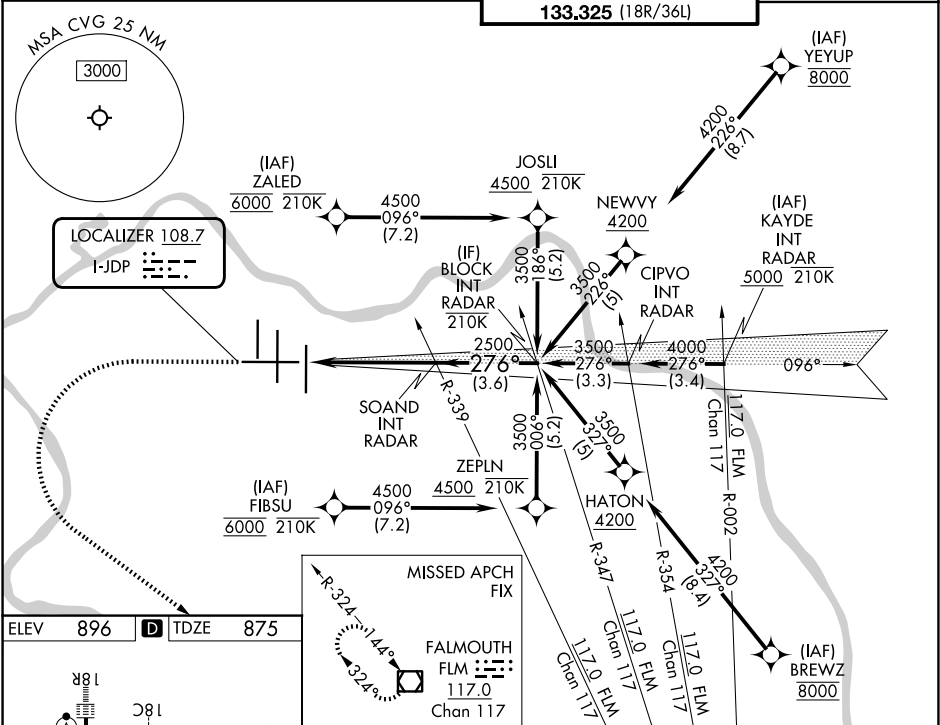

ELEV 896

D

TDZE 875

HIRL all Rwy's

TDZ/CL all Rwy's except 27

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

2000

3000

FLM

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 67°).

SOAND INT RADAR

2500

3500

276°

GS 3.00°

TCH 55°

CATEGORY	A	B	C	D
S-ILS 27*	1075/24		200 (200-½)	
S-LOC 27	1340/24	465 (500-½)	1340/50	465 (500-1)
CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)

SE-1, 25 DEC 2025 to 22 JAN 2026

SE-1, 25 DEC 2025 to 22 JAN 2026