

APP CRS
186°

Rwy Ldg **11000**
TDZE **875**
Apt Elev **896**

RNAV (RNP) Z RWY 18C

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)


RNP AR APCH - GPS. Authorization required. From JEKEL or LTYER: RF.

For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C.
For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all
Cats visibility to 1½ SM. Simultaneous approach authorized.

MALSR


MISSED APPROACH: Climb to 3000 direct JITEV and on track 181° to ZIRKE and hold.


D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	GND CON 121.7
--------------------------	--	---	-------------------------

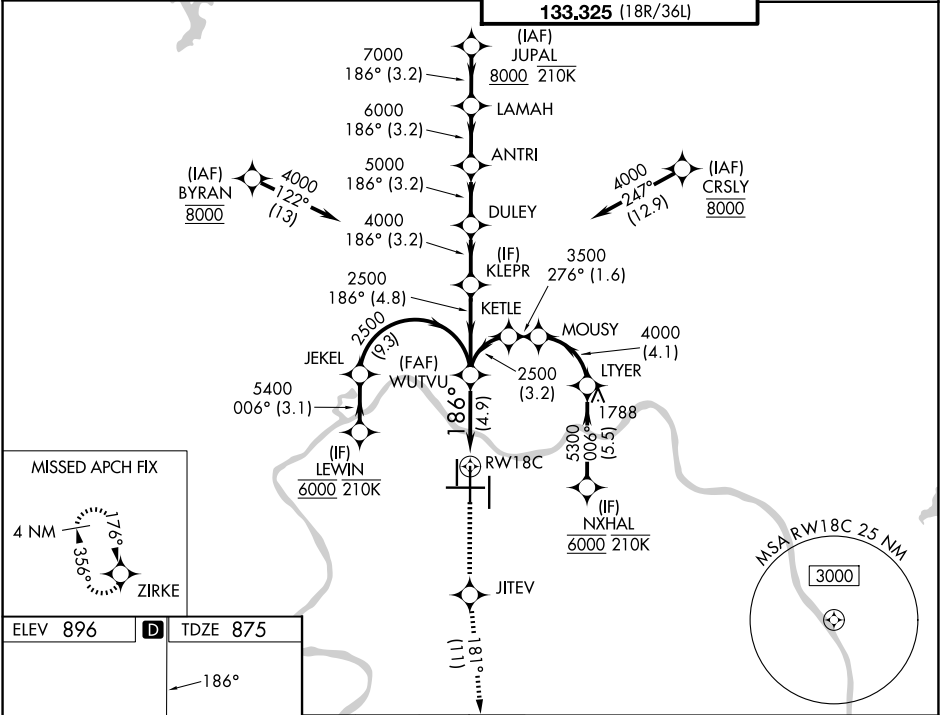

ELEV 896

D

TDZE 875

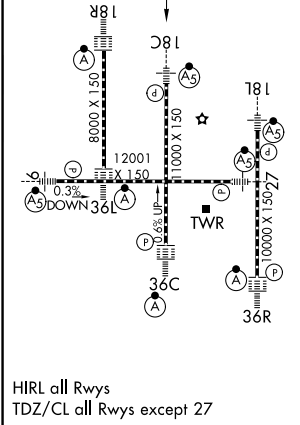

HIRL all Rwy
TDZ/CL all Rwy except 27


3000 JITEV

tr 181°

ZIRKE

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 71).

See planview for multiple IF locations.

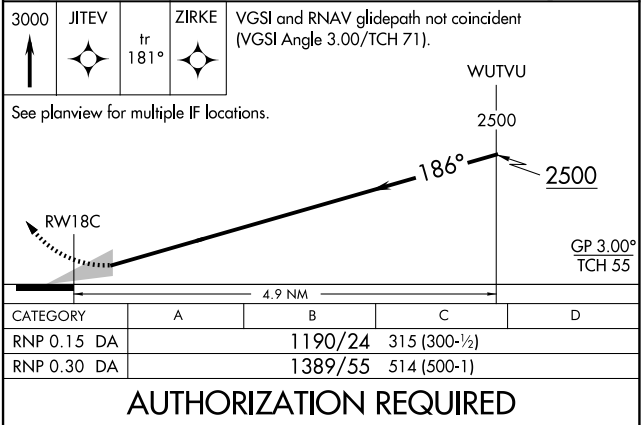

WUTVU 2500

RWY 18C

GP 3.00°
TCH 55

4.9 NM

CATEGORY	A	B	C	D
RNP 0.15 DA		1190/24	315 (300-½)	
RNP 0.30 DA		1389/55	514 (500-1)	

AUTHORIZATION REQUIRED