

WAAS CH 49099 W36A	APP CRS 006°	Rwy Ldg 8000 TDZE 873 Apt Elev 896
--	------------------------	---

RNAV (GPS) Y RWY 36L

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.

ALSF-2




MISSED APPROACH: Climb to 3000 direct KRTHY and on 329° track to BATHY and hold.

D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON
134.375	119.7 363.15 (090°-269°)	118.975 360.85 (18L/36R)	121.7
	123.875 363.15 (270°-089°)	118.3 (9/27. 18C/36C)	

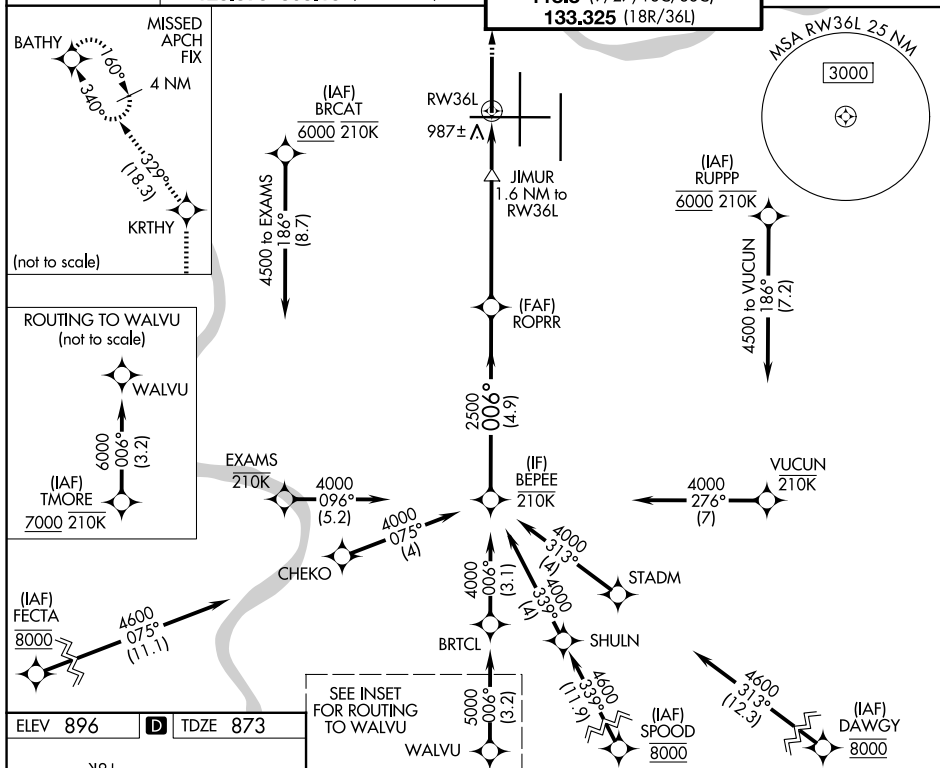

ELEV 896	D	TDZE 873
----------	----------	----------

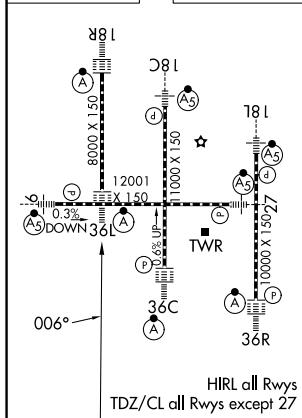

CATEGORY	A	B	C	D
LPV DA		1073/18	200 (200-½)	
LNAV/VNAV DA		1240/35	367 (400-¾)	
LNAV MDA	1240/24	367 (400-½)	1240/35	367 (400-¾)
CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)