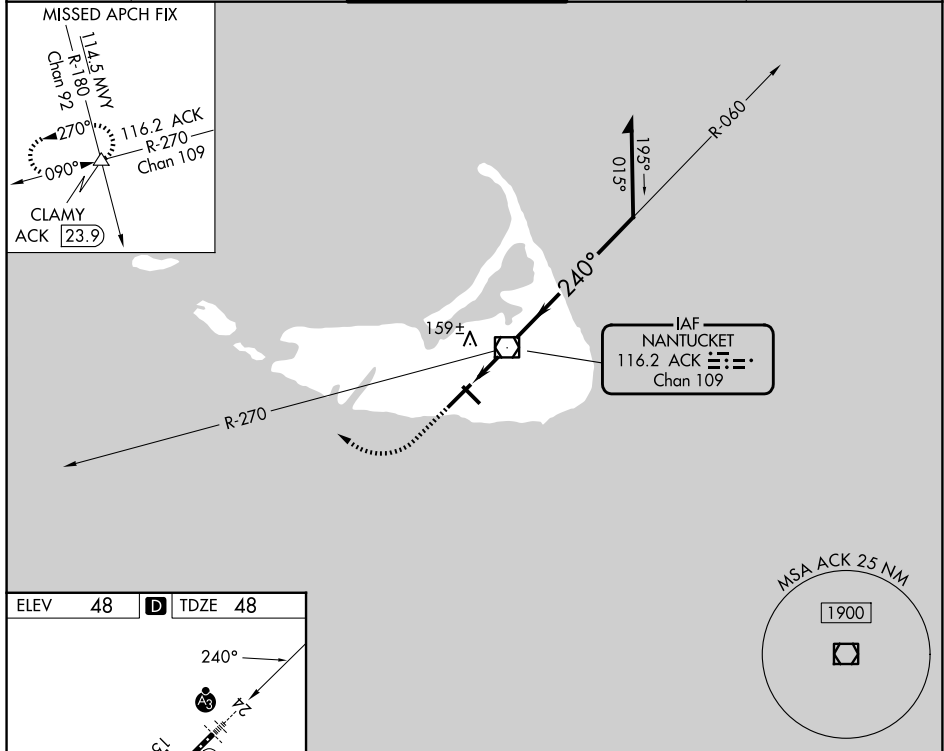


VOR RWY 24  
NANTUCKET MEML (ACK)

**MISSED APPROACH:** Climb to 700 then climbing right turn to 2500 via heading 310° and ACK VOR/DME R-270 to CLAMY INT/ACK 23.9 DME and hold.

MISSED APCH FIX

|          |                      |                      |                      |                                                                                                                                                                                                                                                                            |  |  |  |
|----------|----------------------|----------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| 700<br>↑ | 2500<br>hdg<br>310°  | ACK<br>R-270         | CLAMY<br>△           | <div>ACK<br/>VOR/DME<br/>6000</div> <div>Remain within 10 NM</div> <div>60°</div> <div>1800</div> <div>240°</div> <div>800</div> <div>VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 48).</div> <div>3.47°<br/>TCH 48</div> <div>1 NM</div> <div>0.9 NM</div> |  |  |  |
| CATEGORY | A                    | B                    | C                    | D                                                                                                                                                                                                                                                                          |  |  |  |
| S-24     | 440/24               | 393 (400-½)          | 440/40               | 393 (400-¾)                                                                                                                                                                                                                                                                |  |  |  |
| CIRCLING | 480-1<br>433 (500-1) | 500-1<br>453 (500-1) | 720-2<br>673 (700-2) | 720-2¼<br>673 (700-2¼)                                                                                                                                                                                                                                                     |  |  |  |