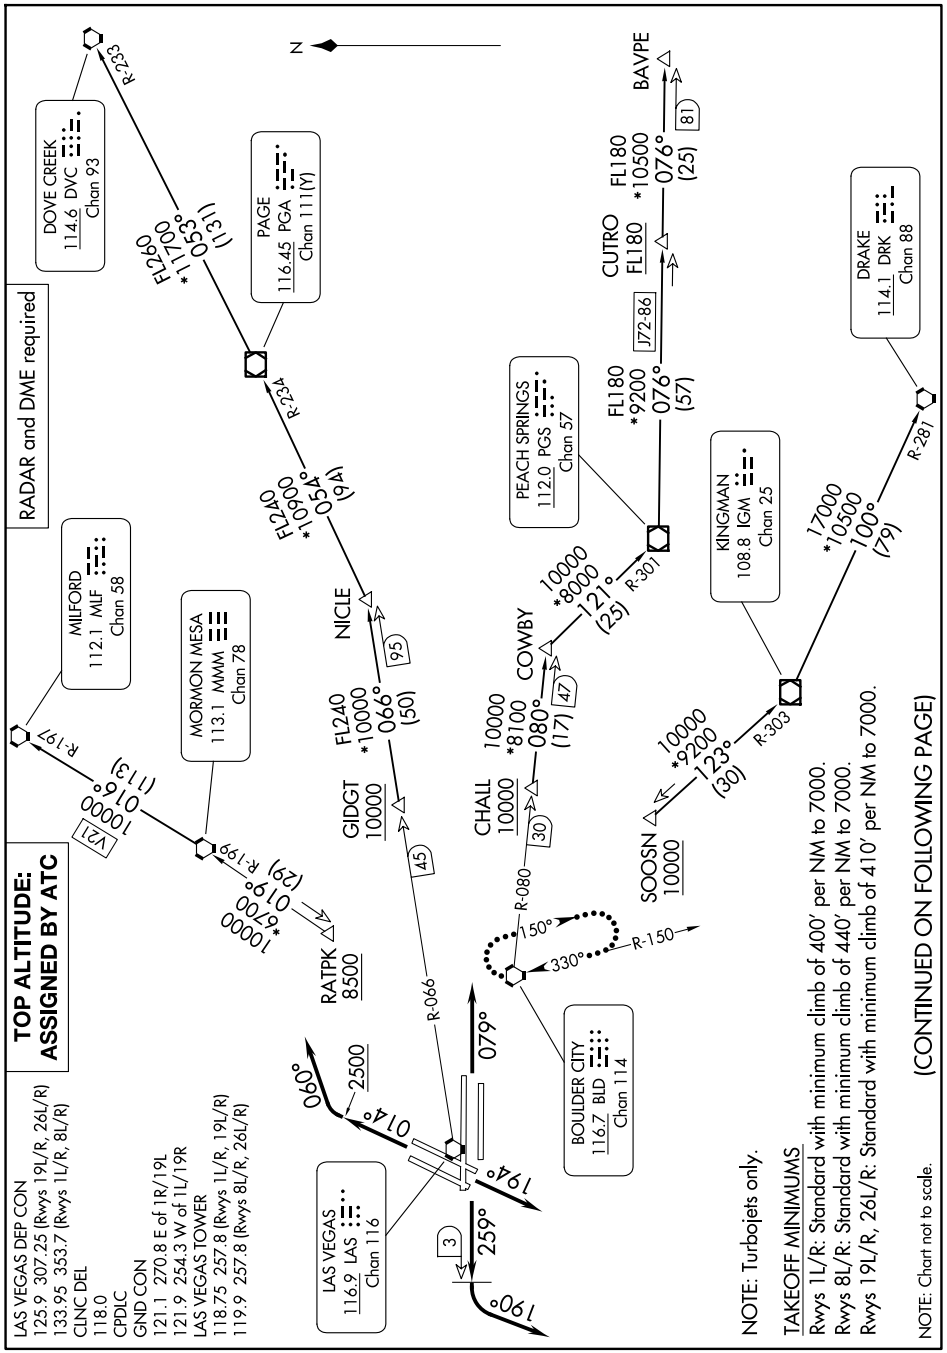

NOTE: Turbojets only.

TAKEOFF MINIMUMS

Rwys 1L/R: Standard with minimum climb of 400′ per NM to 7000.
Rwys 8L/R: Standard with minimum climb of 440′ per NM to 7000.
Rwys 19L/R, 26L/R: Standard with minimum climb of 410′ per NM to 7000.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)