



WAAS CH 86443 W16A	APP CRS 166°	Rwy Ldg TDZE 505 Apt Elev 505
--	------------------------	---

RNAV (GPS) RWY 16

REDDING RGNL (RDD)

RNP APCH.	MISSED APPROACH: Climb to 3000 direct UKDOW and hold.
Rwy 16 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 53°C.	

ATIS 124.1	OAKLAND CENTER 132.2 350.3	REDDING TOWER ★ 119.8 (CTAF) 0 269.25	GND CON 121.7	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------	-------------------------

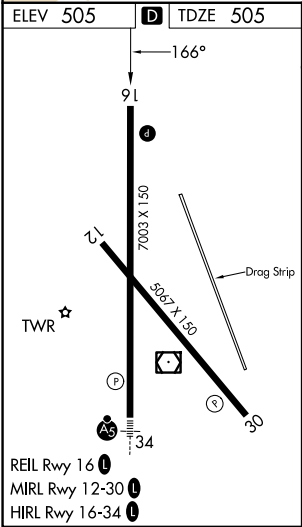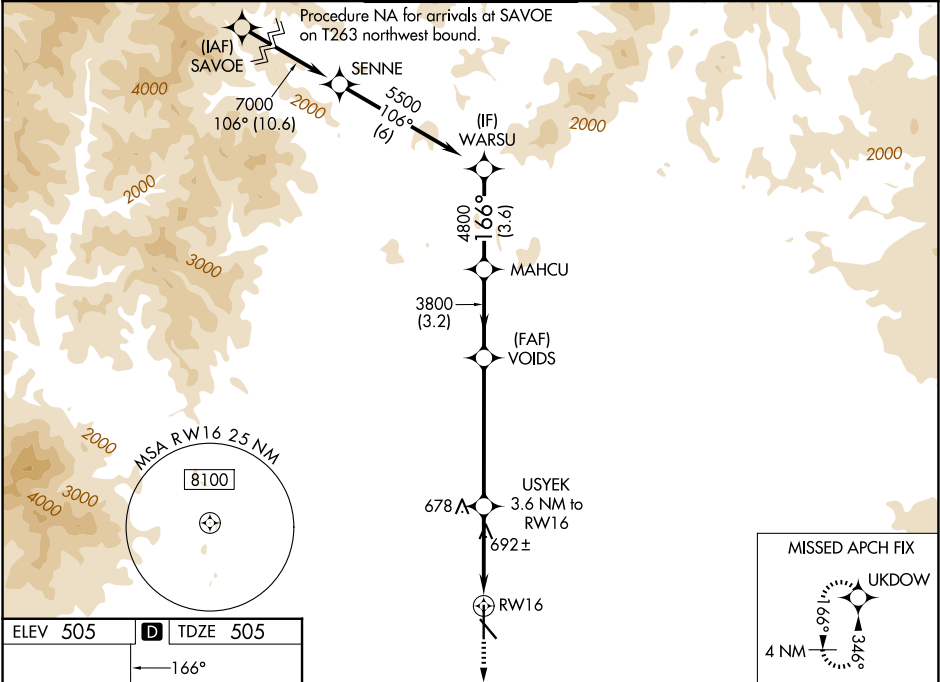

3000 UKDOW	VGSI and RNAV glidepath not coincident (VGSI Angle 3.43/TCH 40).			
*LNAV only.	USYEK 3.6 NM to RW16	VOIDS 3800	MAHCU	WARSU 5500
1.3 NM to RW16	1860	3800	4800	GP 3.43° TCH 55
1.3 NM	2.3 NM	5.3 NM	3.2 NM	3.6 NM
CATEGORY	A	B	C	D
LPV DA	755-¾	250 (300-¾)	775-⅞	270 (300-⅞)
LNAV/VNAV DA	892-1½ 387 (400-1½)			
LNAV MDA	960-1	455 (500-1)	960-1⅓	455 (500-1⅓)
CIRCLING	960-1 455 (500-1)	1000-1 495 (500-1)	1120-1¾ 615 (700-1¾)	1340-2¾ 835 (900-2¾)