

WAAS CH 42899 W10A	APP CRS 104°	Rwy Ldg TDZE 5516 Apt Elev 5516
--	------------------------	---

RNAV (GPS) RWY 10


CENTRAL WYOMING RGNL (RIW)

⚠


DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lander altimeter setting and increase all DA 54 feet and all MDA 60 feet, and increase LPV and LNAV/VNAV all Cats visibility ¼ mile and increase LNAV Cat C/D visibility ½ mile. Baro-VNAV and VDP NA when using Lander altimeter setting. Rwy 10 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 48°C (118°F).

MISSED APPROACH: Climb to 8600 direct DONVY and hold.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

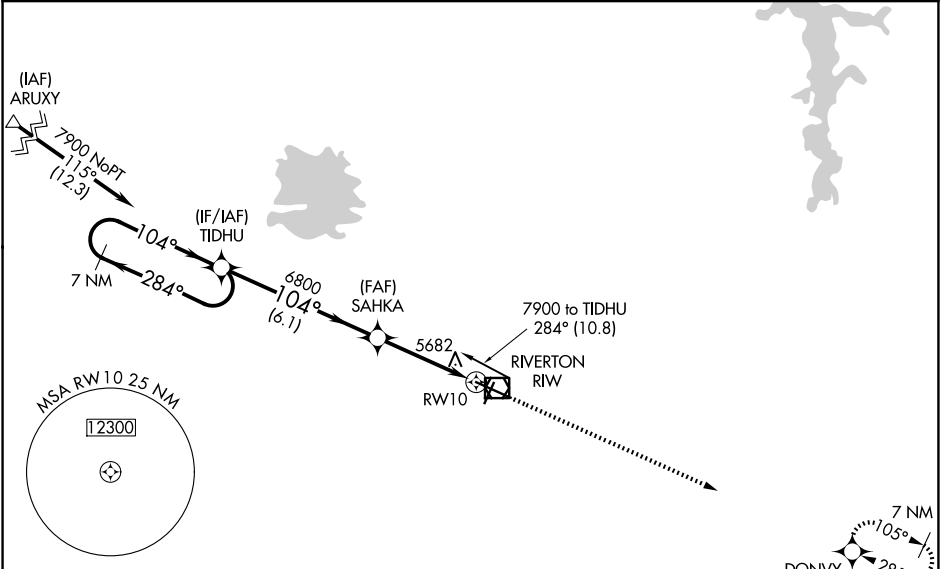

ELEV 5516	D	TDZE 5516
-----------	----------	-----------

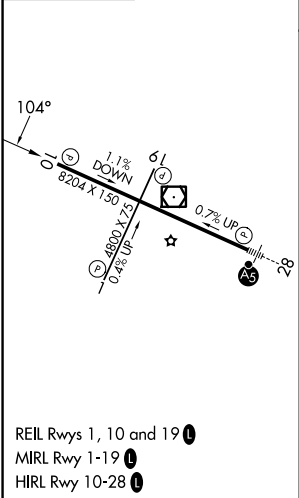

7 NM Holding Pattern TIDHU SAHKA GP 3.00° TCH 50 7900 ← 284° 104° → 6800 6.1 NM 2.7 NM 1.2 NM				8600 DONVY *LNAV only. *1.2 NM to RWY 10 RWY 10
CATEGORY	A	B	C	D
LPV DA	5902-1¼ 386 (400-1¼)			
LNAV/VNAV DA	5965-1½ 449 (500-1½)			
LNAV MDA	5940-1	424 (500-1)	5940-1¼	424 (500-1¼)
CIRCLING	6000-1	484 (500-1)	6000-1½	6120-2
			484 (500-1½)	604 (700-2)

NW-1, 25 DEC 2025 to 22 JAN 2026

NW-1, 25 DEC 2025 to 22 JAN 2026