


LOC/DME I-MVY	APP CRS	Rwy Ldg	5504
108.7	236°	TDZE	63
Chan 24		Apt Elev	67

ILS or LOC RWY 24
MARTHA'S VINEYARD (MVY)


VDP NA with Hyannis altimeter setting. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA to 317 feet and all MDA 60 feet; increase S-LOC Cats C and D visibility to RVR 5000, Circling Cat C and D visibility 1/4 SM. For inoperative MALS R when using Hyannis altimeter setting, increase S-LOC Cats C and D visibility to 1 3/8 mile. Circling Rwy 15 NA at night. ** RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Hyannis altimeter setting).

MALS R
MISSED APPROACH:
Climb to 800 then
climbing left turn to 2500
on MVY VOR/DME R-180
to CLAMY INT/ACK 23.9
DME and hold.

ATIS 126.25	BOSTON APP CON 133.75	VINEYARD TOWER ★ 121.4 (CTAF) 0	GND CON 124.35	UNICOM 122.95
----------------	--------------------------	------------------------------------	-------------------	------------------

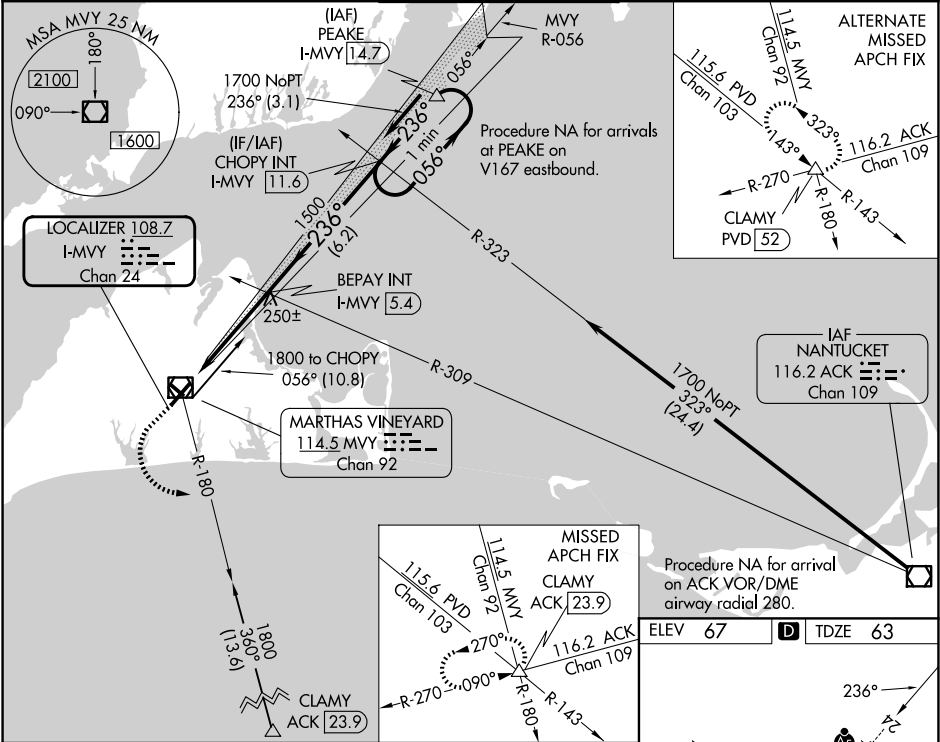

800	2500	CLAMY	Use I-MVY DME when on the localizer course.			
MVY R-180		△	BEPAY INT I-MVY 5.4	CHOPY INT I-MVY 11.6	One Minute Holding Pattern	
*LOC only	I-MVY 1	*I-MVY 2.3	1500	1500	056°	1700
					236°	236°
						GS 3.00° TCH 51
	1.2 NM	3.2 NM	6.2 NM			
CATEGORY	A	B	C	D		
S-ILS 24**	263/24 200 (200-1/2)					
S-LOC 24	500/24	437 (500-1/2)	500/40	437 (500-3/4)		
CIRCLING	500-1 433 (500-1)	540-1 473 (500-1)	700-1 3/4 633 (700-1 3/4)	780-2 1/4 713 (800-2 1/4)		

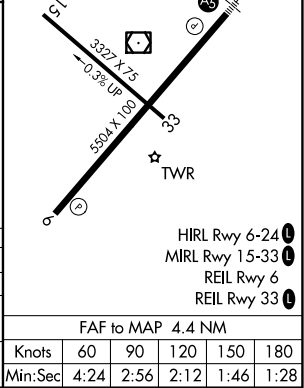

NE-1, 25 DEC 2025 to 22 JAN 2026

NE-1, 25 DEC 2025 to 22 JAN 2026