

WAAS CH 48804 W24A	APP CRS 236°	Rwy Ldg TDZE Apt Elev	5504 63 67
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 24

MARTHA'S VINEYARD (MVY)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F), DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility to RVR 5200; increase LNAV Cats C/D visibility to RVR 5000; increase Circling visibility Cats C to 2 miles and D to 2 ½ mile. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile. For inop MALSR using Hyannis altimeter setting, increase LPV all Cats visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1½ mile and increase LNAV Cats C/D visibility to 1½ mile. VDP and Baro-VNAV NA when using Hyannis altimeter setting. Night landing: Rwy 15 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hyannis altimeter setting.


MALSR

AS

MISSED APPROACH:

Climb to 500 then climbing left turn to 2500 direct CLAMY and hold.

ATIS 126.25	BOSTON APP CON 133.75	VINEYARD TOWER ★ 121.4 (CTAF) 0	GND CON 124.35	UNICOM 122.95
-----------------------	---------------------------------	---	--------------------------	-------------------------

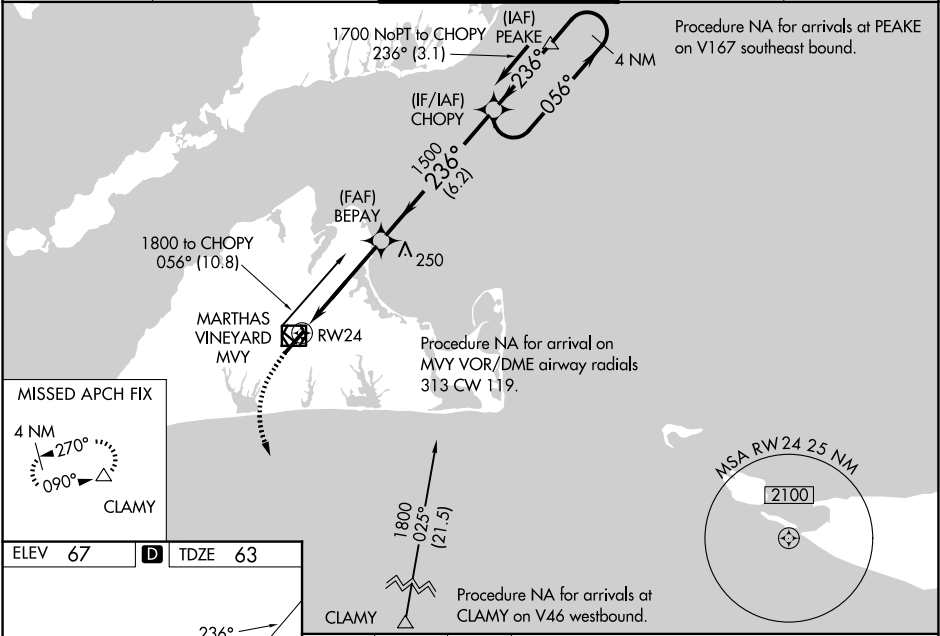

ELEV 67

D

TDZE 63

3377 X 75
-0.3% UP

550 X 1.05

33

TWR

236°

15

AS

2

HIRL Rwy 6-24 1

MIRL Rwy 15-33 1

REIL Rwy 6

REIL Rwy 33 1

	500	2500	CLAMY	
	↑	↻	△	
	*LNAV only	*1.2 NM to RW24		
			1500	
			236°	
			056°	1700
			236°	
			1500	
			GP 3.00° TCH 51	
	1.2 NM	3.2 NM	6.2 NM	
CATEGORY	A	B	C	D
LPV DA		** 263/24	200 (200-½)	
LNAV/ VNAV DA		480/47	417 (500-1)	
LNAV MDA	500/24	437 (500-½)	500/40	437 (500-¾)
CIRCLING	500-1 433 (500-1)	540-1 473 (500-1)	700-1¾ 633 (700-1¾)	780-2¼ 713 (800-2¼)