

WAAS CH 97619 W22A	APP CRS 224°	Rwy Ldg TDZE Apt Elev	6502 750 755
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

UNIVERSITY OF ILLINOIS/WILLARD (CMI)

RNP APCH - GPS.

▼


▲

ASR

Rwy 22 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH:
Climb to 2300 direct
BOSTN and hold.

ATIS 124.85	CHAMPAIGN APP CON ★ 121.35 285.65 (319°-138°) 132.85 290.225 (139°-318°)	CHAMPAIGN TOWER ★ 120.4 (CTAF) 0 229.4	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

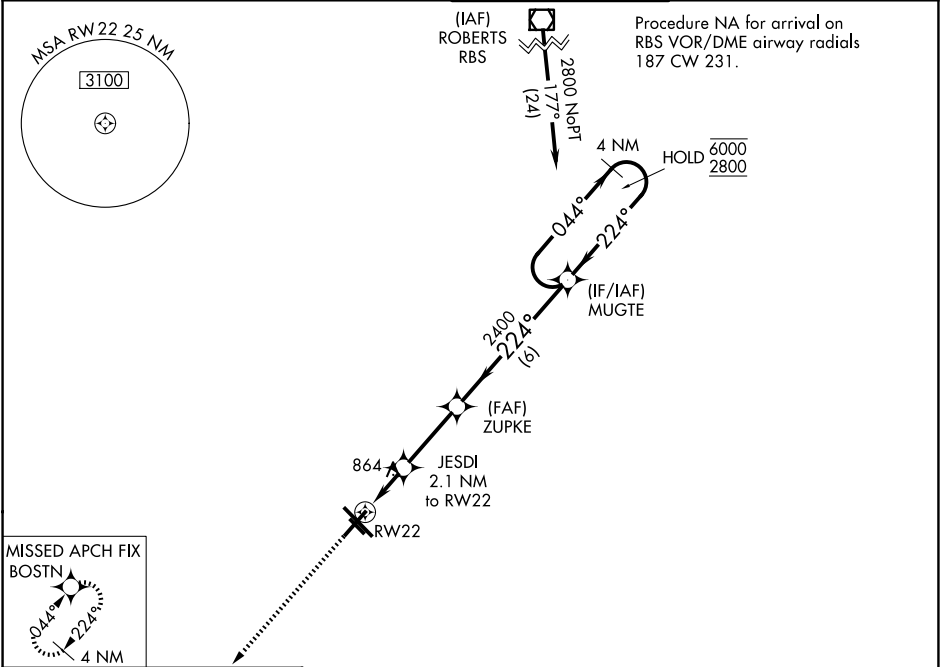

ELEV 755

D

TDZE 750

224°

141

8101 X 150

8101 X 150

3816 X 25

32L

32R

TWR

2300

BOSTN

JESDI

2.1 NM to RW22

ZUPKE

2400

MUGTE

4 NM Holding Pattern

044°

6000

224°

2800

GP 3.00°

TCH 43

1 NM

1.1 NM

2.9 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	1000-¾ 250 (300-¾)			
LNAV/VNAV DA	1219-1⅓ 469 (500-1⅓)			
LNAV MDA	1120-1 370 (400-1)			
CIRCLING	1240-1 485 (500-1)		1500-2¼ 745 (800-2¼)	1500-2½ 745 (800-2½)

HIRL Rwy 14L-32R

MIRL Rwy 4-22

MIRL Rwy 14R-32L