

LOC I-OKK	APP CRS	Rwy Idg	6001
108.9	230°	TDZE	827
		Apt Elev	832

ILS or LOC RWY 23

KOKOMO MUNI (OKK)

RADAR required for procedure entry.

▼


NA

For inop ALS, increase S-LOC 23 Cat C/D visibility to 1½ SM.
* DME from OKK


MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 2600 direct MZZ VOR/DME and hold.

AWOS-3PT 128.675	GRISSEM APP CON* 121.05 338.275	CLNC DEL 120.0	UNICOM 123.0 (CTAF) 0
---------------------	------------------------------------	-------------------	--------------------------

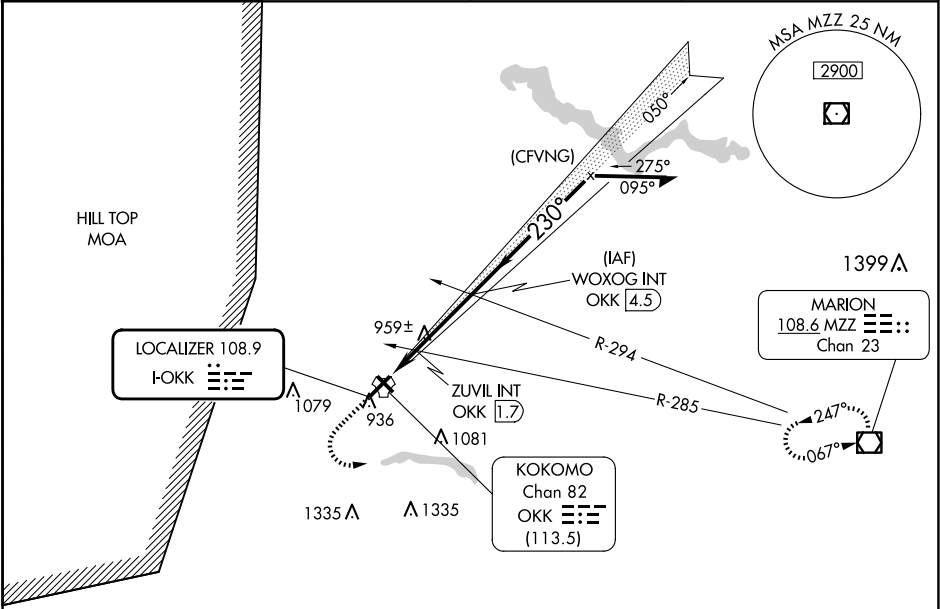

ELEV 832	TDZE 827
----------	----------

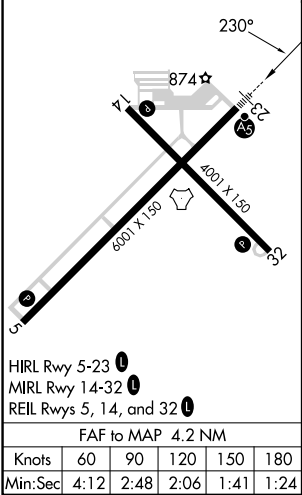

	1400	2600	MZZ	
			ZUVIL INT OKK 1.7	
			WOXOG INT OKK 4.5	
			2200	2400
			1300	2200
			1.4 NM	2.8 NM
CATEGORY	A	B	C	D
S-ILS 23	1027-½ 200 (200-½)			
S-LOC 23	1300-½	473 (500-½)	1300-1	473 (500-1)
CIRCLING	1300-1	468 (500-1)	1400-1½ 568 (600-1½)	1420-2 588 (600-2)
ZUVIL FIX MINIMUMS* (DUAL VOR RECEIVERS or DME REQUIRED)				
S-LOC 23	1220-½	393 (400-½)	1220-¾	393 (400-¾)
CIRCLING	1260-1 428 (500-1)	1300-1 468 (500-1)	1400-1½ 568 (600-1½)	1420-2 588 (600-2)