

ILS or LOC RWY 10L
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)



T Simultaneous approach authorized.
For inop ALS, increase S-LOC 10L Cats A, B visibility to RVR 5500.

A PAKEE Fix Minimums: increase S-LOC 10L Cats A/B visibility to RVR 5500,
Cats C/D to RVR 6000.



MISSED APPROACH: Climb to 800 then climbing left turn to 4000 on FLL VOR/DME R-090 to MARTS INT/FLL 9.2 DME and hold. Continue climb-in-hold to 4000.

GND CON
121.4

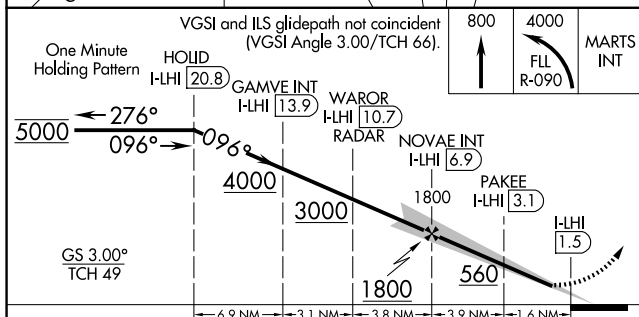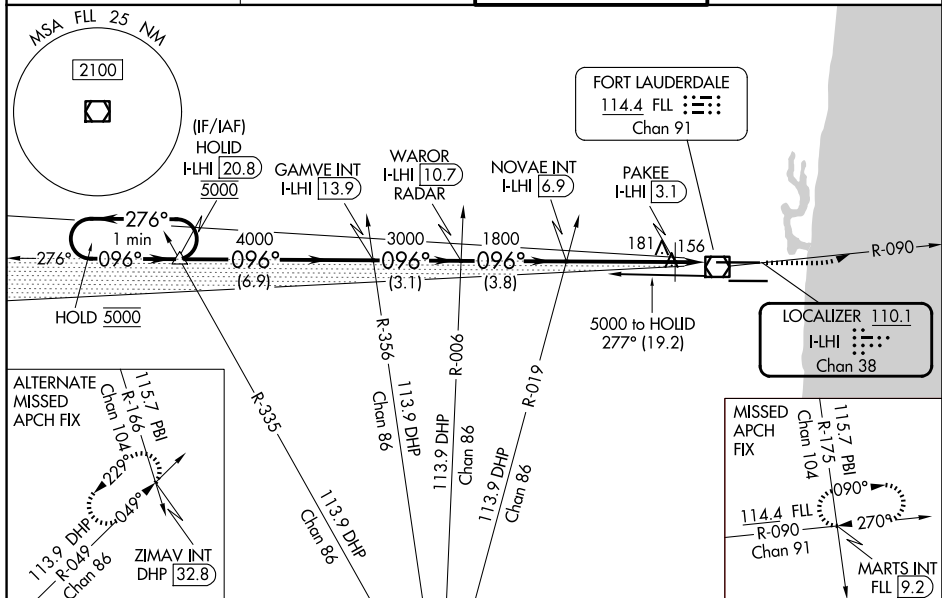

CATEGORY	A	B	C	D
S-ILS 10L	207/24		200 (200-½)	
S-LOC 10L	560/24	553 (500-½)	560/60	553 (500-1¼)
CIRCLING	680-1	615 (700-1)	800-2 735 (800-2)	800-2¼ 735 (800-2¼)
PAKEE FIX MINIMUMS (DME REQUIRED)				
S-LOC 10L	420/24	413 (400-½)	420/40	413 (400-¾)
CIRCLING	680-1	615 (700-1)	800-2 735 (800-2)	800-2¼ 735 (800-2¼)

