

WAAS CH 58336 W28B	APP CRS 276°	Rwy Ldg TDZE 65 Apt Elev 65
--	------------------------	---

RNAV (GPS) RWY 28L
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

RNP APCH-GPS.

▼

▲

Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.


MALSF

⚡

≡

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct GEGEY and hold.

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4
------------------------	---------------------------------------	---	-------------------------

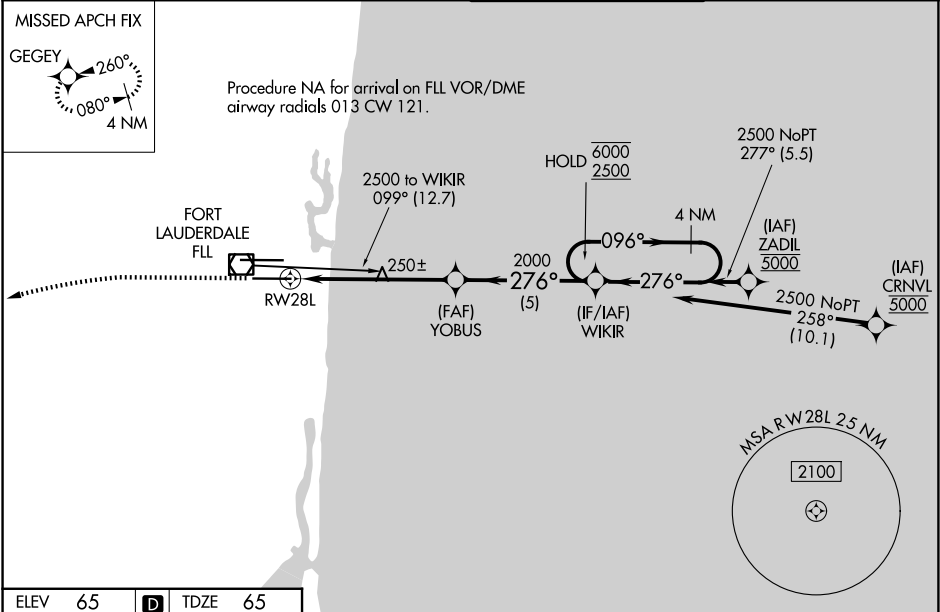

ELEV 65

D

TDZE 65

1000

3000

GEGEY

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 69).

WIKIR

4 NM
Holding Pattern

YOBUS

2000

1.2 NM to
RW28L

276°

096°

6000

2500

GP 3.00°
TCH 53

1.2 NM

4.7 NM

5 NM

10L

28R

9000 X 150

TWR

8000 X 150

UP

DOWN

276°

CATEGORY	A	B	C	D
LPV DA	265/40		200 (200-¾)	
LNAV/VNAV DA	459/45		394 (400-⅞)	
LNAV MDA	500/40	435 (500-¾)	500/50	435 (500-1)
CIRCLING	680-1	615 (700-1)	800-2 735 (800-2)	800-2¼ 735 (800-2¼)

SE-3, 25 DEC 2025 to 22 JAN 2026

SE-3, 25 DEC 2025 to 22 JAN 2026