

WAAS CH 69338 W02A	APP CRS 023°	Rwy Ldg TDZE Apt Elev	3604 591 597
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2

GARY/CHICAGO INTL (GYY)

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
Rwy 2 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Chicago Midway Intl altimeter setting; increase LPV DA to 947 feet and visibility ⅛ SM, LNAV/VNAV DA to 1135 feet and visibility ¼ SM; increase all MDAs 60 feet and Circling Cats C and D visibility ¼ SM. Baro-VNAV NA when using Chicago Midway Intl altimeter setting.

MISSED APPROACH:
Climb to 2000 then climbing right turn to 2800 direct KILPY and hold.

ATIS 134.575	CHICAGO APP CON 133.1 285.6	GARY TOWER ★ 125.6 (CTAF) 0	GND CON 121.9
------------------------	---------------------------------------	---------------------------------------	-------------------------

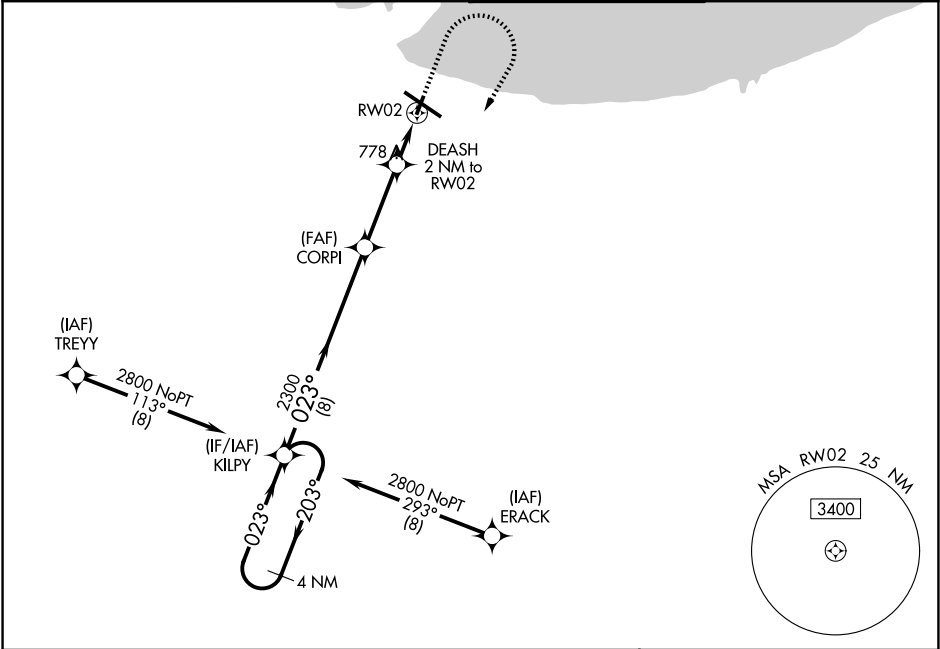

4 NM Holding Pattern KILPY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

2000

2800

KILPY

ELEV 597 TDZE 591

GP 3.00° TCH 60

2800

203°

023°

2300

023°

2300

DEASH 2 NM to RWY 2

RWY 2

*1280

8 NM

3.2 NM

2 NM

CATEGORY	A	B	C	D
LPV DA	901-7⁄8 310 (400-%)			
LNAV/VNAV DA	1089-1³⁄₈ 498 (500-1%)			
LNAV MDA	1040-1 449 (500-1)	1040-1³⁄₈ 449 (500-1%)		
CIRCLING	1140-1 543 (600-1)	1180-1 583 (600-1)	1400-2¼ 803 (900-2¼)	1420-2¾ 823 (900-2¾)

8850 x 150

20

3000

100

2

TWR

023°

1 MRL Rwy 2-20

1 HIRL Rwy 12-30

1 REIL Rws 2, 12 and 20

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026