

TOP ALTITUDE:  
ASSIGNED BY ATC


RNAV 1 - DME/DME/IRU or GPS.  
RADAR required.

CLEVELAND DEP CON  
125.35 346.325  
AWOS-3PT  
119.225  
CTAF  
122.725

(ZAAPA6.ZAAPA) 25331  
ZAAPA SIX DEPARTURE (RNAV)

AL-753 (FAA)

LAKE COUNTY EXEC (LNN)  
WILLOUGHBY, OHIO

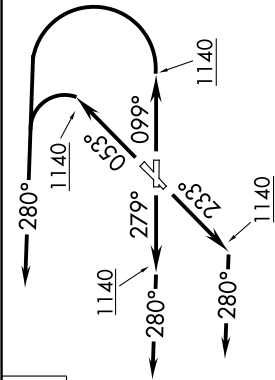


TAKEOFF MINIMUMS:  
Rwys 5, 10, 23, 28: Standard with minimum climb  
of 500' per NM to 1140.

DEPARTURE ROUTE DESCRIPTION

**TAKEOFF RUNWAY 5:** Climb on heading 053° to 1140, then left turn heading 280° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....  
**TAKEOFF RUNWAY 10:** Climb on heading 099° to 1140, then left turn heading 280° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....  
**TAKEOFF RUNWAY 23:** Climb on heading 233° to 1140, then on heading 280° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....  
**TAKEOFF RUNWAY 28:** Climb on heading 279° to 1140, then on heading 280° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....  
....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUUDL TRANSITION (ZAAPA6.PUUDL)  
SINKR TRANSITION (ZAAPA6.SINKR)  
SNNOH TRANSITION (ZAAPA6.SNNOH)

NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

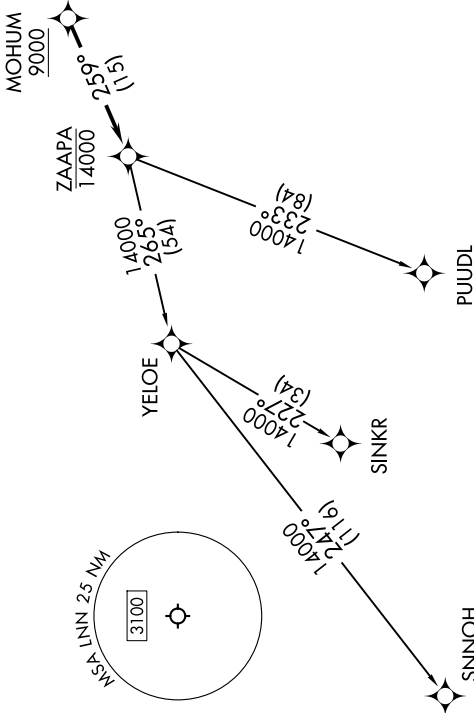

NOTE: Chart not to scale.

ZAAPA SIX DEPARTURE (RNAV)  
(ZAAPA6.ZAAPA) 27NOV25

WILLOUGHBY, OHIO  
LAKE COUNTY EXEC (LNN)