

LOC/DME I-CHO <u>111.7</u> Chan 54	APP CRS 030°	Rwy Idg 6801 TDZE 640 Apt Elev 640
--	------------------------	---

ILS or LOC RWY 3


T VDP NA when using Orange altimeter setting. When local altimeter setting not received, use Orange altimeter setting and increase S-ILS 3 DA to 911 and all MDA 80 feet;
A increase S-LOC 3 JTTV fix minimums Cats C/D, S-LOC 3 Cats C/D, all Circling Cats C/D, and JTTV fix minimums Circling Cats C/D visibility $\frac{1}{2}$ SM. For Inop ALS when using Orange altimeter setting, increase S-ILS 3 all Cats visibility to $\frac{1}{2}$ SM, S-LOC 3 Cats C/D visibility to 2 SM, and S-LOC 3 JTTV fix minimums Cats C/D visibility to $\frac{1}{2}$ SM.



MISSED APPROACH:
Climb to 2000 then
climbing right turn to
4000 direct GVE
VORTAC and hold.

ATIS 118.425	POTOMAC APP CON 132.85 323.125	CHARLOTTESVILLE TOWER ★ 124.5 (CTAF) 0 338.275	GND CON 121.9 338.275	UNICOM 122.95
-----------------	-----------------------------------	---	--------------------------	------------------

ALTERNATE MISSED APCH FIX

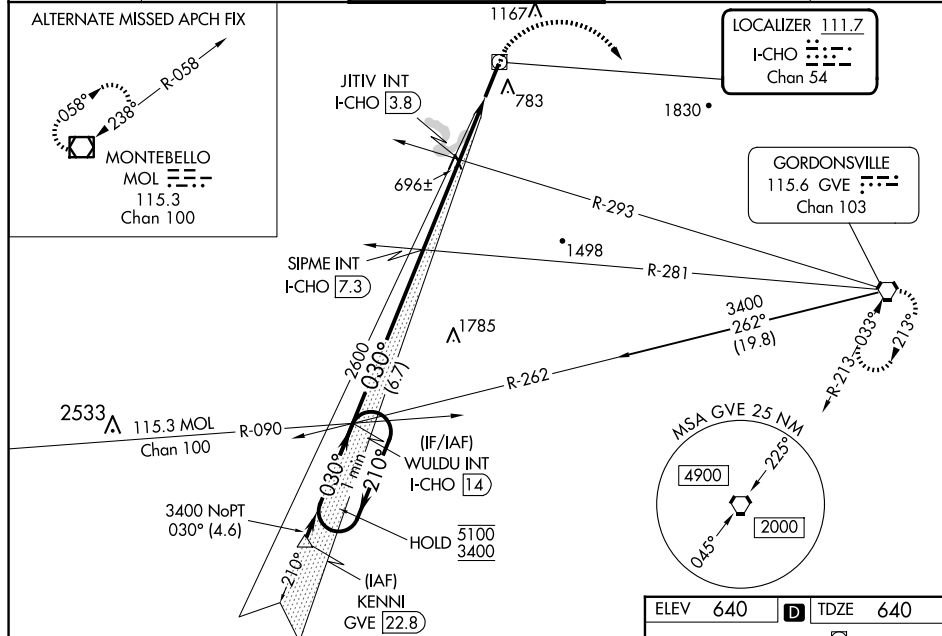

NE-3, 25 DEC 2025 to 22 JAN 2026

One Minute Holding Pattern

WULDU INT I-CHO 1.4

SIPME INT I-CHO 7.3

JITIV INT I-CHO 3.8

GS 3.00° TCH 54

*1280 when using Orange altimeter setting.

6.7 NM

3.5 NM

1.6 NM

0.9 NM

VGS and ILS glidepath not coincident (VGS Angle 3.00/TCH 53).

2000

4000

GVE

CATEGORY	A	B	C	D
S-ILS 3	840-1½ 200 (200-1½)			
S-LOC 3	1280-1½	640 (700-1½)	1280-1½	640 (700-1½)
C CIRCLING	1280-1	640 (700-1)	1500-2½ 860 (900-2½)	1500-2¾ 860 (900-2¾)
JITIV FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 3	980-1½	340 (400-1½)	980-5⁄8	340 (400-5⁄8)
C CIRCLING	1100-1	460 (500-1)	1500-2½ 860 (900-2½)	1500-2¾ 860 (900-2¾)

