

RNAV (GPS) RWY 17
COX FLD (PRX)



▼ Baro-VNAV and VDP NA when using SLR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 868 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1016 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2200 direct
CUKBO and hold.

AWOS-3PT
119.675

FORT WORTH CENTER
124.875 370.95

UNICOM
122.975 (CTAF) **L**

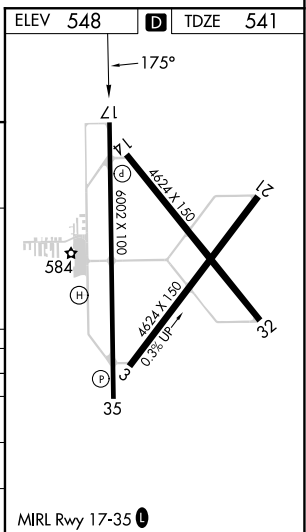

SC-2, 25 DEC 2025 to 22 JAN 2026