

WAAS CH 63001 W35A	APP CRS 355°	Rwy Ldg 6002 TDZE 532 Apt Elev 548
--	------------------------	---


RNAV (GPS) RWY 35
COX FLD (PRX)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Baro-VNAV and VDP NA when using SLR altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 859 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1002 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility C/D ¼ SM, and Circling visibility C/D ¼ SM.

MISSED APPROACH:
Climb to 2200 direct
PUYOS and hold.

AWOS-3PT 119.675	FORT WORTH CENTER 124.875 370.95	UNICOM 122.975 (CTAF) 0
----------------------------	--	-----------------------------------

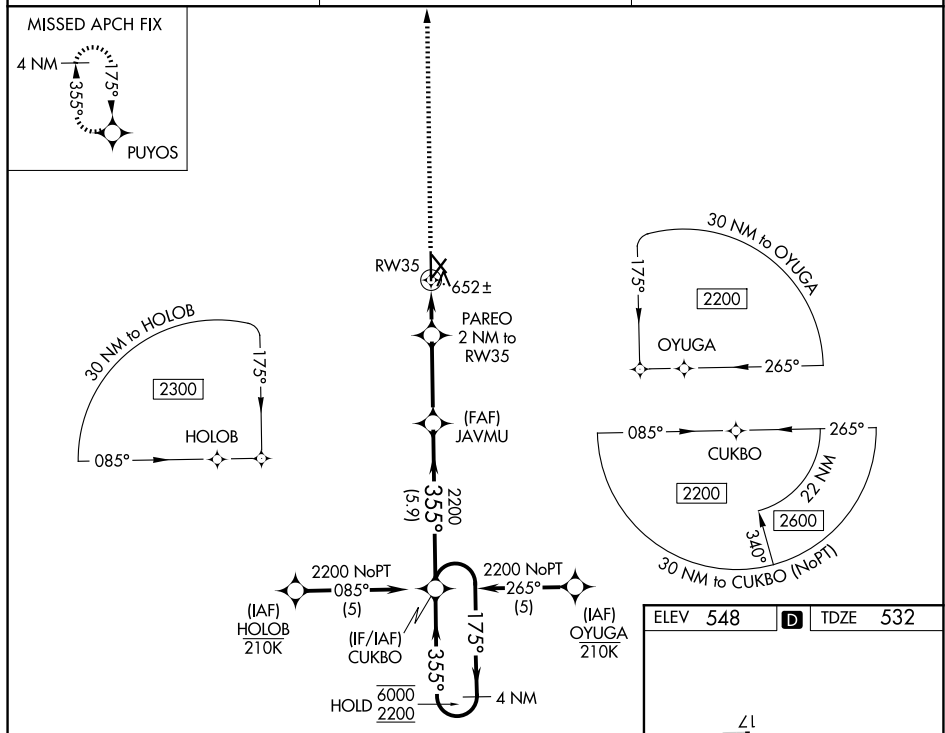

CATEGORY	A	B	C	D
LPV DA		782- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)	
LNAV/VNAV DA		925-1 $\frac{1}{8}$	393 (400-1 $\frac{1}{8}$)	
LNAV MDA	920-1	388 (400-1)	920-1 $\frac{1}{8}$	388 (400-1 $\frac{1}{8}$)
CIRCLING	1060-1	512 (600-1)	1100-1 $\frac{1}{2}$ 552 (600-1 $\frac{1}{2}$)	1220-2 $\frac{1}{4}$ 672 (700-2 $\frac{1}{4}$)

