


|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>53504</b><br><b>W31A</b> | APP CRS<br><b>311°</b> | Rwy Ldg <b>9200</b><br>TDZE <b>354</b><br>Apt Elev <b>366</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 31


EAST TEXAS RGNL (GGG)

|                 |                                                                                                                                                                                                                                                                                                                                                                                                    |                                                          |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| RNP APCH - GPS. | <div><div><div></div><div></div></div><div>Baro-VNAV and VDP NA when using Gilmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Gilmer altimeter setting and increase all DA 59 feet, all MDA 60 feet. Increase LPV visibility all Cats ½ SM and Circling visibility Cats C/D/E ¼ SM.</div></div> | MISSED APPROACH:<br>Climb to 2600 direct BOSME and hold. |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|

|                       |                                             |                                             |                         |                         |
|-----------------------|---------------------------------------------|---------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>119.65</b> | LONGVIEW APP CON★<br><b>124.675 257.975</b> | EASTEX TOWER★<br><b>119.2(CTAF) 0377.05</b> | GND CON<br><b>121.6</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---------------------------------------------|---------------------------------------------|-------------------------|-------------------------|

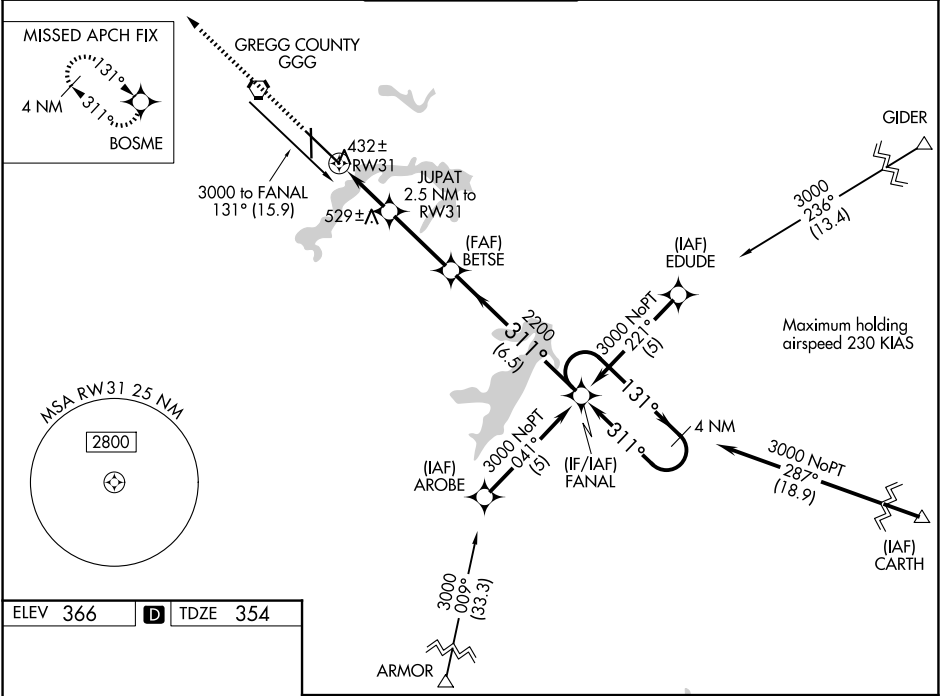

|          |   |          |
|----------|---|----------|
| ELEV 366 | D | TDZE 354 |
|----------|---|----------|

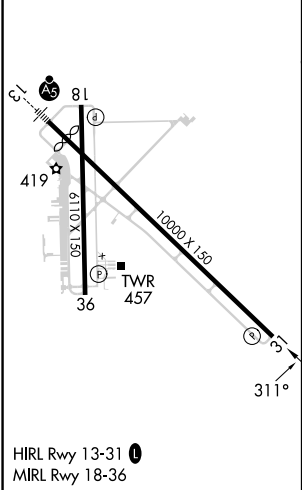

|              |                       |                      |                           |                            |                            |
|--------------|-----------------------|----------------------|---------------------------|----------------------------|----------------------------|
| 2600         | BOSME                 | JUPAT 2.5 NM to RW31 | BETSE                     | FANAL                      | 4 NM Holding Pattern       |
| 1200         | 2200                  | 1.2 NM to RW31       | 2200                      | 311°                       | 3000                       |
| 1.2          | 1.3                   | 3.1 NM               | 6.5 NM                    |                            |                            |
| CATEGORY     | A                     | B                    | C                         | D                          | E                          |
| LPV DA       | 604-3/4 250 (300-3/4) |                      |                           |                            |                            |
| LNAV/VNAV DA | 682-1 328 (400-1 1/4) |                      |                           |                            |                            |
| LNAV MDA     | 800-1                 | 446 (500-1)          | 800-1 3/8 446 (500-1 3/8) | 800-1 1/2 446 (500-1 1/2)  |                            |
| CIRCLING     | 860-1                 | 494 (500-1)          | 980-1 3/4 614 (700-1 3/4) | 1080-2 1/4 714 (800-2 1/4) | 1080-2 1/2 714 (800-2 1/2) |

SC-2, 25 DEC 2025 to 22 JAN 2026

SC-2, 25 DEC 2025 to 22 JAN 2026