

|                                   |                        |                             |                                         |
|-----------------------------------|------------------------|-----------------------------|-----------------------------------------|
| LOC I- <b>UIN</b><br><b>110.1</b> | APP CRS<br><b>038°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>7098</b><br><b>763</b><br><b>768</b> |
|-----------------------------------|------------------------|-----------------------------|-----------------------------------------|

ILS or LOC RWY 4

QUINCY RGNL-BALDWIN FLD (UIN)

ADF required.  
RADAR required for procedure entry at RAYOK.

▼


NA

DME from UIN TACAN. DME use requires simultaneous reception of I-UIN and UIN TACAN. When local altimeter setting not received, use Pittsfield altimeter setting and increase S-ILS 04 DA to 1033 feet; increase all MDAs 80 feet and S-LOC 04 visibility Cat C/D ¾ SM. For inop ALS when local altimeter not received, increase S-ILS 4 all Cats visibility to ¾ SM and S-LOC 4 Cat C and D visibility to 1 ¾ SM.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 2300 direct QUINCY LOM and hold.

|                        |                                              |                                 |
|------------------------|----------------------------------------------|---------------------------------|
| ASOS<br><b>121.425</b> | KANSAS CITY CENTER<br><b>126.225 317.775</b> | UNICOM<br><b>123.0 (CTAF) 1</b> |
|------------------------|----------------------------------------------|---------------------------------|

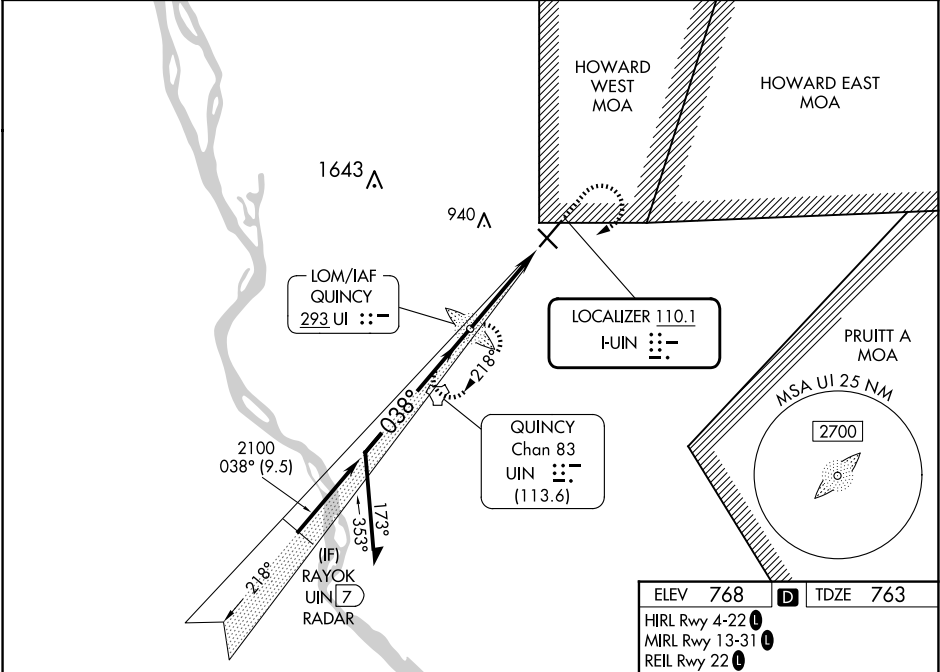

Remain within 10 NM

2300

218°

038°

2100

GS 3.00° TCH 41

2500

2035

3.9 NM

1800

2300

UI

|          |                    |                    |                      |                    |
|----------|--------------------|--------------------|----------------------|--------------------|
| CATEGORY | A                  | B                  | C                    | D                  |
| S-ILS 4  | 963-½ 200 (200-½)  |                    |                      |                    |
| S-LOC 4  | 1160-½ 397 (400-½) | 1160-⅝ 397 (400-⅝) |                      |                    |
| CIRCLING | 1180-1 412 (500-1) | 1220-1 452 (500-1) | 1240-1½ 472 (500-1½) | 1320-2 552 (600-2) |

FAF to MAP 3.9 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 3:54 | 2:36 | 1:57 | 1:34 | 1:18 |