

LOM UI	APP CRS	Rwy Idg	7098
293	038°	TDZE	763
		Apt Elev	768


NDB RWY 4
QUINCY RGNL-BALDWIN FLD (UIN)

NA For inop ALS, increase S-04 Cat A and B visibility to 1 SM and Cat C and D visibility to 1 1/2 SM. When local altimeter setting not received, use Pittsfield altimeter setting and increase all MDAs 80 feet and S-04 visibility Cat C/D 1/4 SM. For inop ALS when local altimeter setting not received increase S-04 Cat A/B visibility to 1 SM and Cat C/D visibility to 1 3/8 SM.


MALSR 

MISSED APPROACH: Climb to 1800 then climbing right turn to 2300 direct UI LOM and hold.

ASOS 121.425	KANSAS CITY CENTER 126.225 317.775	UNICOM 123.0 (CTAF) 
-----------------	---------------------------------------	--

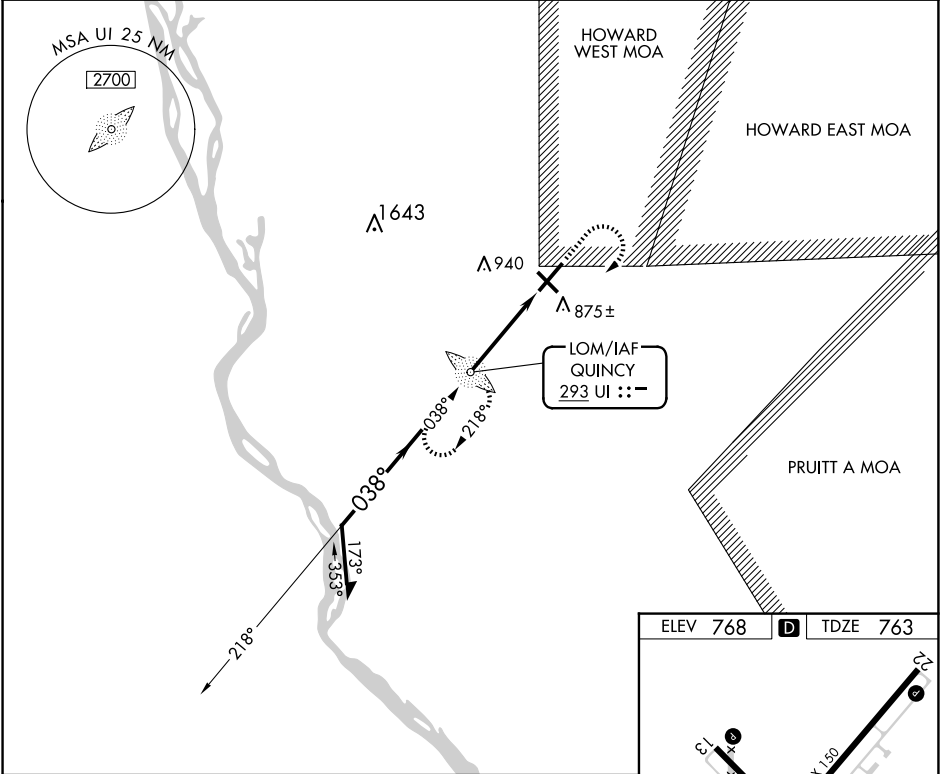

Remain within 10 NM				
2300				
218°				
038°				
2100				
3.17°				
TCH 39				
3.9 NM				
CATEGORY	A	B	C	D
S-4	1180-3/4 417 (500-3/4)			
CIRCLING	1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1 1/2 472 (500-1 1/2)	1320-2 552 (600-2)

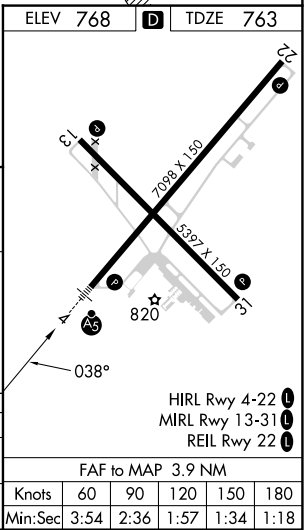

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026