


WAAS CH 45913 W14A	APP CRS 141°	Rwy Ldg TDZE 258 Apt Elev 258
--	------------------------	---


RNAV (GPS) RWY 14
SHREVEPORT RGNL (SHV)

RNP APCH.	For inop ALS, increase LNAV Cat C and D visibility to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.	ALSF-2 	MISSED APPROACH: Climb to 3000 direct COBAV and hold, continue to climb-in-hold to 3000.
-----------	--	------------	--

ATIS 128.45	SHREVEPORT APP CON 119.9 335.55	SHREVEPORT TOWER 121.4 236.775	GND CON 121.175 236.775	CLNC DEL 124.65
-----------------------	---	--	-----------------------------------	---------------------------

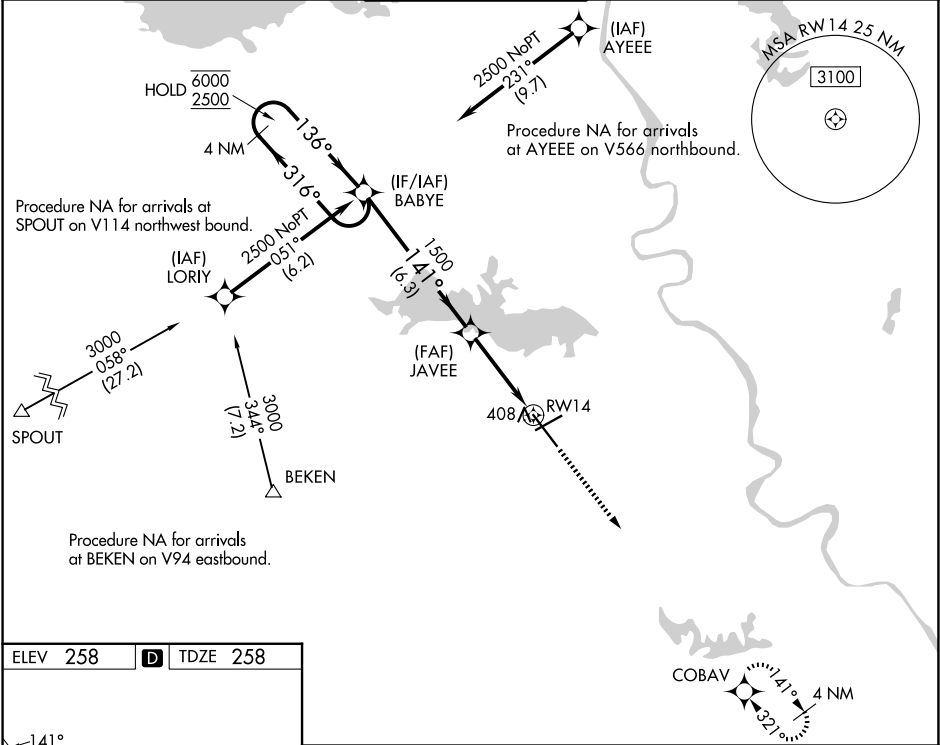

ELEV 258	D	TDZE 258
----------	----------	----------

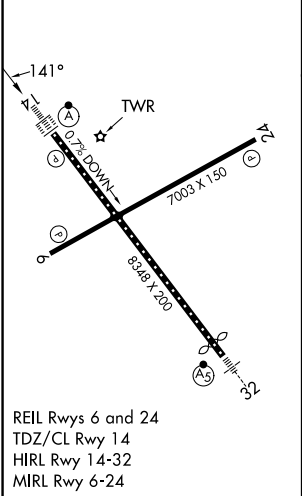

4 NM Holding Pattern		BABYE		3000	COBAV
6000 2500		316° 136°	141°	1500	*LNAV only.
GP 3.00° TCH 51		6.3 NM	2.6 NM	1.1 NM	
CATEGORY	A	B	C	D	
LPV DA		458/18	200 (200-½)		
LNAV/VNAV DA		640/40	382 (400-¾)		
LNAV MDA	660/24	402 (500-½)	660/40	402 (500-¾)	
CIRCLING	760-1	502 (600-1)	980-2 722 (800-2)	1100-2¾ 842 (900-2¾)	

SC-4, 25 DEC 2025 to 22 JAN 2026

SC-4, 25 DEC 2025 to 22 JAN 2026