


VORTAC TWF	APP CRS	Rwy Ldg	8704
113.1	077°	TDZE	4149
Chan 78		Apt Elev	4154

VOR RWY 8
JOSLIN FLD/MAGIC VALLEY RGNL (TWF')

V Circling to Rwy 30 NA at night. When local altimeter setting not received, use Jerome altimeter setting and increase all MDA 60 feet and S-8 Cats C and D visibility ½ mile, S-8 Cat B and Circling Cat B and C visibility ¼ mile. Increase AZAJI FIX minimums S-8 Cat C and D and Circling Cat C visibility ¼ mile. VDP NA when using Jerome altimeter setting.

A MISSED APPROACH: Climb to 6000 then left turn direct TWF VORTAC and hold.

ASOS 135.025	TWIN FALLS APP CON * 126.7 353.75	TWIN FALLS TOWER * 118.2 (CTAF) 0 317.5	GND CON 121.7	UNICOM 122.95
-----------------	--------------------------------------	--	------------------	------------------

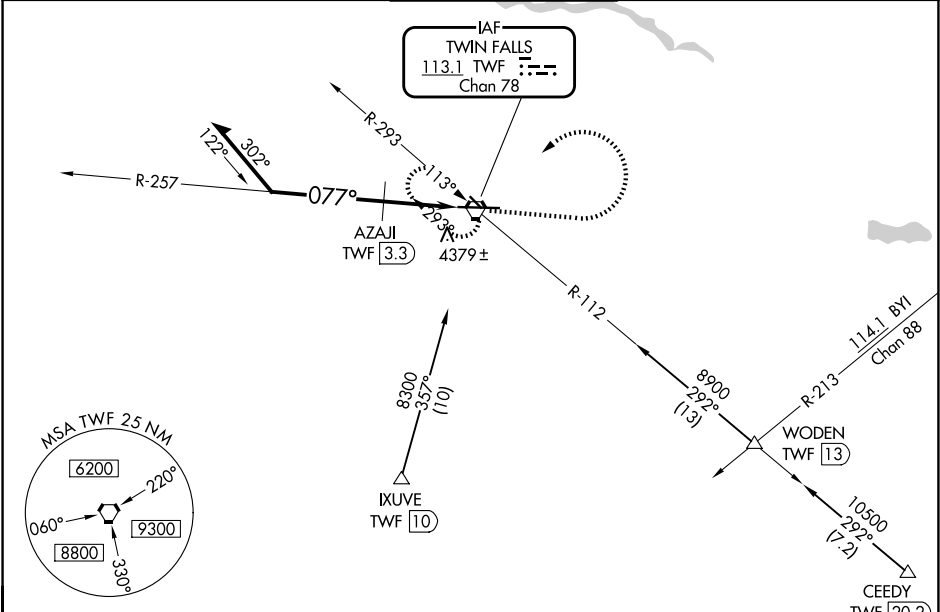

ELEV 4154	TDZE 4149
-----------	-----------

VGSI and descent angle not coincident (VGSI Angle 3.00/TCH 49).

Remain within 10 NM

6000

077°

257°

AZAJI TWF (3.3)

TWF VORTAC

3.02° TCH 49

*5060

1.3 NM

1.4 NM

6000

TWF

*5120 when using Jerome altimeter setting.

CATEGORY	A	B	C	D
S-8	5060-1¼	911 (1000-1¼)	5060-2½	911 (1000-2½)
CIRCLING	5060-1¼	906 (1000-1¼)	5100-2¾ 946 (1000-2¾)	5100-3 946 (1000-3)
AZAJI FIX MINIMUMS				
S-8	4640-1	491 (500-1)	4640-1⅜	491 (500-1⅜)
CIRCLING	4700-1 546 (600-1)	4780-1 626 (700-1)	5100-2¾ 946 (1000-2¾)	5100-3 946 (1000-3)