


WAAS CH 69400 W31A	APP CRS 312°	Rwy Ldg TDZE 1062 Apt Elev 1077
--	------------------------	---


RNAV (GPS) RWY 31
DUBUQUE RGNL (DBQ)

RNP APCH - GPS.	MALSRL	MISSED APPROACH: Climb to 2800 direct HULOT and hold.
For inop ALS, increase LPV all Cats visibility to 1½ SM and LNAV Cats A and B visibility to 1 SM. Baro-VNAV NA when using Monticello altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. VDP NA when using Monticello altimeter setting. If local altimeter setting not received, use Monticello altimeter setting and increase all DAs/MDAs 100 feet.		

ATIS 127.25	CHICAGO CENTER 133.95 281.4	DUBUQUE TOWER★ 119.5 (CTAF) 0 254.4	GND CON 121.8	UNICOM 122.95
-----------------------	---------------------------------------	---	-------------------------	-------------------------

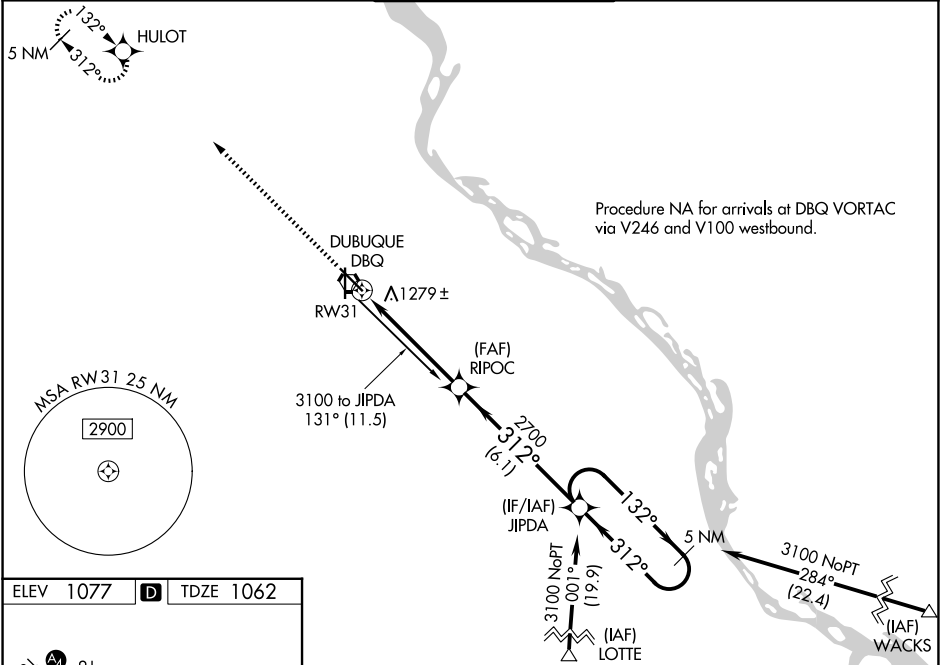

ELEV 1077	D	TDZE 1062
-----------	---	-----------

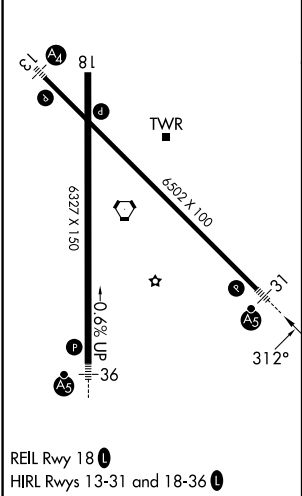

2800	HULOT	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 57).	JIPDA	5 NM Holding Pattern
*LNAV only.		*1.3 NM to RW31	RIPOC	
				GP 3.00° TCH 50
CATEGORY	A	B	C	D
LPV DA	1481-1 419 (500-1)			
LNAV/VNAV DA	1603-1½ 541 (600-1½)			
LNAV MDA	1540-¾ 478 (500-¾)			1540-1 478 (500-1)
CIRCLING	1620-2 543 (600-2)			1800-2¼ 723 (800-2¼)

NC-3, 25 DEC 2025 to 22 JAN 2026

NC-3, 25 DEC 2025 to 22 JAN 2026