

LOC/DME I-CLL
110.55
Chan **42(Y)**

APP CRS
346°

Rwy Ldg
TDZE
Apt Elev
6932
311
321

ILS or LOC RWY 35
EASTERWOOD FLD (CLL)

ADF or DME required for procedure entry. ADF or DME required for LOC only.

▼

▲


For inop ALS, increase S-ILS 35 Cat E visibility to ¾ SM and S-LOC 35 Cat E visibility to 1¾ SM. ILS glideslope unusable for coupled approaches below 1050 feet MSL.

MALSR

AS

MISSED APPROACH: Climb to 2500 on I-CLL north course to DERRS INT/I-CLL 11.5 DME and hold.

ATIS 126.85	HOUSTON APP CON 134.3 360.85	EASTERWOOD TOWER ★ 118.5 (CTAF) 0 284.7	GND CON 128.7 284.7	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

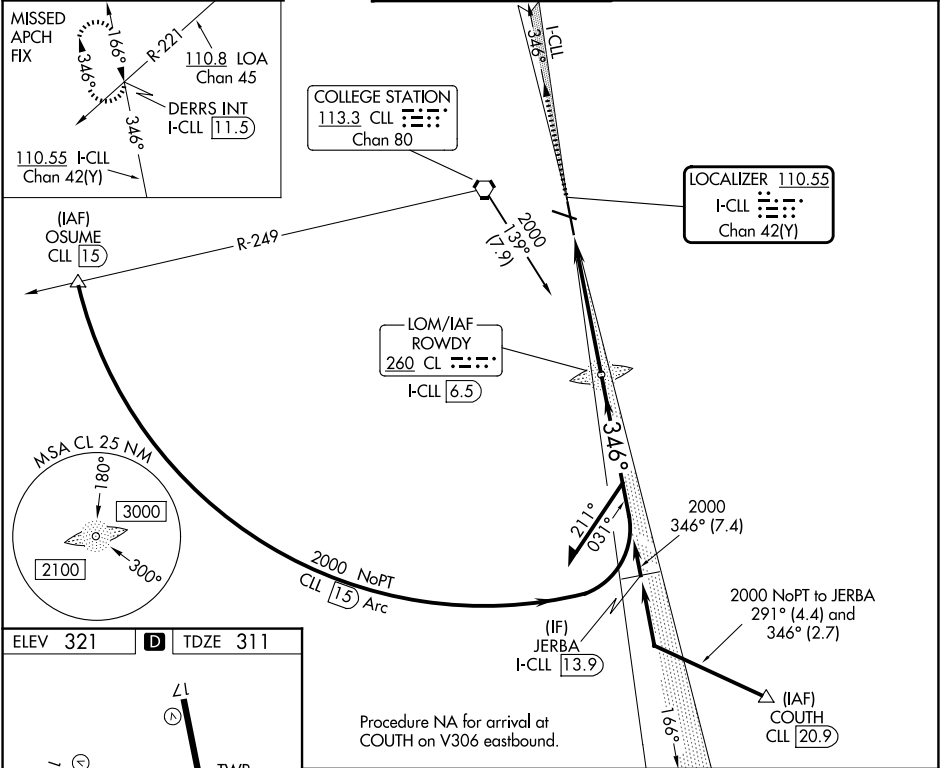

5158 X 150

7000 X 146

29

346°

35

REIL Rwy 29
MIRL Rwy 11-29
HIRL Rwy 17-35

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

2500

I-CLL N crs

DERRS INT

I-CLL 2.6

I-CLL 1.4

1.3

3.8 NM

CATEGORY	A	B	C	D	E
S-ILS 35	511-1/2 200 (200-1/2)				
S-LOC 35	760-1/2 449 (500-1/2) 760-7/8 449 (500-7/8)				
CIRCLING	860-1	880-1	1000-2	1180-2 3/4	1180-3
	539 (600-1)	559 (600-1)	679 (700-2)	859 (900-2 3/4)	859 (900-3)

CL LOM ROWDY I-CLL 6.5

166°

346°

2000

2000

GS 2.90° TCH 57

Use I-CLL DME when on the localizer course.

CATEGORY	A	B	C	D	E
S-ILS 35	511-1/2 200 (200-1/2)				
S-LOC 35	760-1/2 449 (500-1/2) 760-7/8 449 (500-7/8)				
CIRCLING	860-1	880-1	1000-2	1180-2 3/4	1180-3
	539 (600-1)	559 (600-1)	679 (700-2)	859 (900-2 3/4)	859 (900-3)