
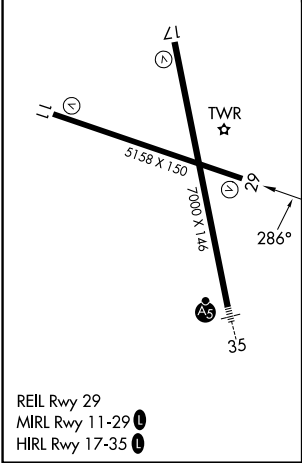


WAAS CH 87022 W29A	APP CRS 286°	Rwy Ldg TDZE 314 Apt Elev 321
--	------------------------	---

RNAV (GPS) RWY 29

EASTERWOOD FLD (CLL)

RNP APCH. ▼ ▲ Baro-VNAV NA when using Caldwell altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. Rwy 29 helicopter visibility reduction below ¾ SM NA.		MISSED APPROACH: Climb to 2000 direct ICESO and hold.		
ATIS 126.85	HOUSTON APP CON 134.3 360.85	EASTERWOOD TOWER ★ 118.5 (CTAF) 0 284.7	GND CON 128.7 284.7	UNICOM 122.95

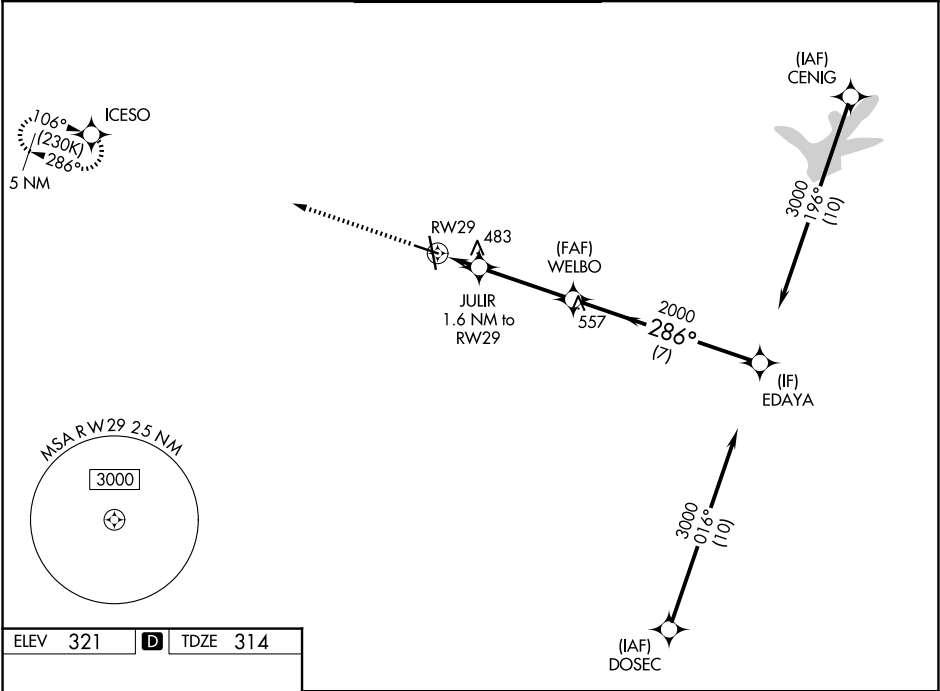

2000 ICESO		EDAYA				
*LNAV only.		WELBO				
RW29		JULIR 1.6 NM to RW29				
860*		2000				
1.6 NM		3.5 NM		7 NM		
CATEGORY	A	B	C	D	E	
LPV DA	564-¾ 250 (300-¾)					
LNAV/VNAV DA	762-1⅜ 448 (500-1⅜)					
LNAV MDA	740-1	426 (500-1)	740-1¼	426 (500-1¼)		
CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2¾ 859 (900-2¾)	1180-3 859 (900-3)	

SC-5, 25 DEC 2025 to 22 JAN 2026

SC-5, 25 DEC 2025 to 22 JAN 2026