


WAAS CH 69217 W04A	APP CRS 044°	Rwy Idg 7701 TDZE 889 Apt Elev 913
--	------------------------	---

RNAV (GPS) RWY 4
CHIPPEWA VALLEY RGNL (EAU)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ½ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH.
Climb to 3000 direct
IROKE and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
-----------------	-----------------------------------	---------------------------------------	--------------------	------------------

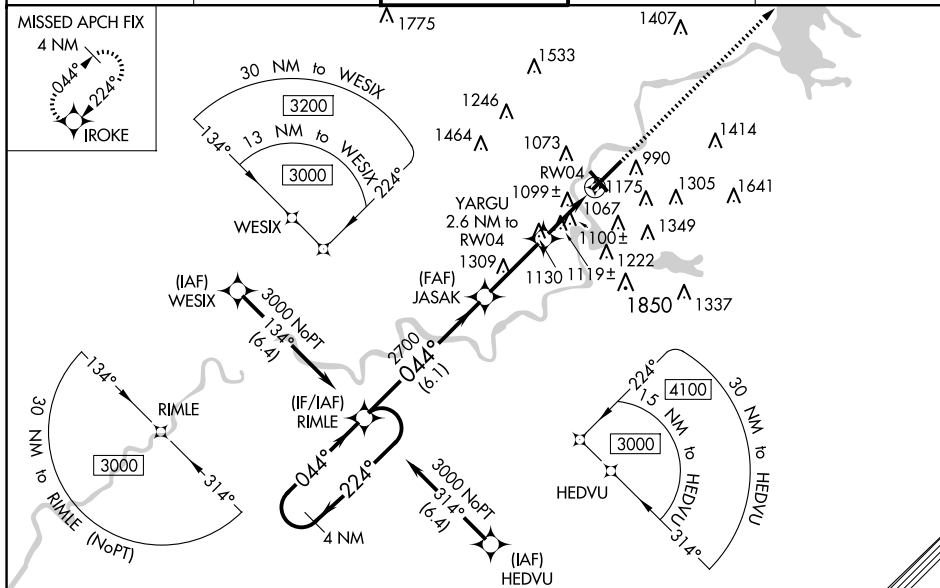

ELEV 913	D	TDZE 889
----------	----------	----------

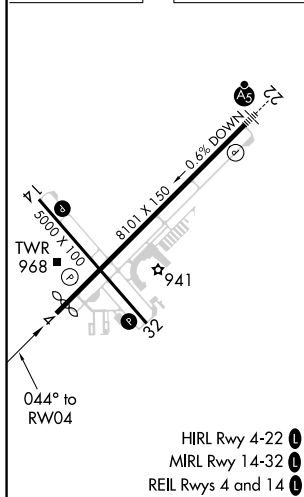

4 NM Holding Pattern

RIMLE

JASAK 2700

YARGU 2.6 NM to RW04

*1740

*1.3 NM to RW04

RW04

GP 3.00° TCH 44

224°

044°

044°

2700

6.1 NM

3 NM

1.3 NM

1.3 NM

FALLS MOA

3000

IROKE

*LNAV only

RNAV (GPS) RWY 4