

|                |             |          |            |
|----------------|-------------|----------|------------|
| VORTAC CVA     | APP CRS     | Rwy Ldg  | 4001       |
| <b>113.8</b>   | <b>216°</b> | TDZE     | <b>750</b> |
| Chan <b>85</b> |             | Apt Elev | <b>751</b> |

VOR RWY 21



DAVENPORT MUNI (DVN)



**▼** Rwy 21 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use MLL altimeter setting and increase all MDAs 60 feet and S-21 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

**▲**

MISSED APPROACH: Climbing right turn to 2400 direct CVA VORTAC and hold.

|                        |                                           |                           |                                 |
|------------------------|-------------------------------------------|---------------------------|---------------------------------|
| ASOS<br><b>120.175</b> | QUAD CITY APP CON★<br><b>125.95 257.8</b> | CLNC DEL<br><b>118.35</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|------------------------|-------------------------------------------|---------------------------|---------------------------------|

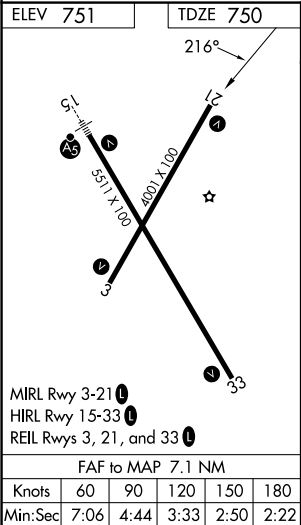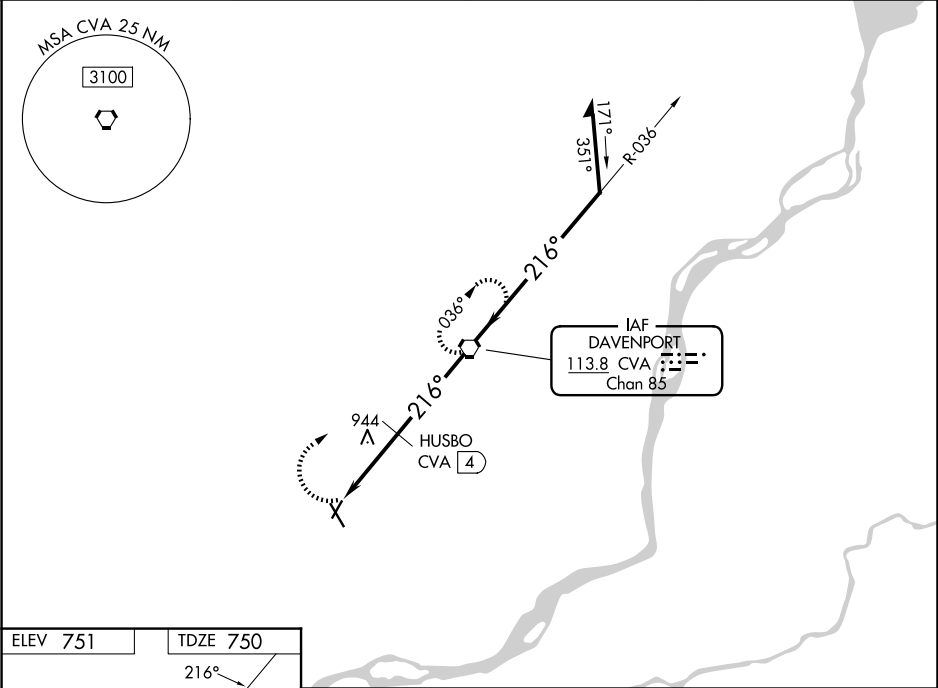

|                                                                                     |                    |                                                                                     |   |                                                                                     |                      |                                                                                     |                    |
|-------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------|---|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|--------------------|
|  |                    |  |   |  |                      |  |                    |
|  |                    |  |   |  |                      |  |                    |
| CVA 7.1                                                                             |                    | HUSBO CVA 4                                                                         |   | 1260*                                                                               |                      | 2400                                                                                |                    |
|                                                                                     |                    |                                                                                     |   | *1320 when using MLL altimeter setting.                                             |                      |                                                                                     |                    |
| CATEGORY                                                                            | A                  |                                                                                     | B |                                                                                     | C                    |                                                                                     | D                  |
| S-21                                                                                | 1260-1 510 (600-1) |                                                                                     |   |                                                                                     | 1260-1⅜ 510 (600-1⅜) |                                                                                     |                    |
| CIRCLING                                                                            | 1300-1 549 (600-1) |                                                                                     |   |                                                                                     | 1300-1½ 549 (600-1½) |                                                                                     | 1320-2 569 (600-2) |
| HUSBO FIX MINIMUMS (DME REQUIRED)                                                   |                    |                                                                                     |   |                                                                                     |                      |                                                                                     |                    |
| S-21                                                                                | 1200-1 450 (500-1) |                                                                                     |   |                                                                                     | 1200-1⅜ 450 (500-1⅜) |                                                                                     |                    |
| CIRCLING                                                                            | 1300-1 549 (600-1) |                                                                                     |   |                                                                                     | 1300-1½ 549 (600-1½) |                                                                                     | 1320-2 569 (600-2) |