

WAAS CH 90104 W14A	APP CRS 140°	Rwy Ldg TDZE 671 Apt Elev 672
--	------------------------	---

RNAV (GPS) RWY 14


KEOKUK MUNI (EOK)

⚠

Baro-VNAV NA when using Burlington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Burlington altimeter setting and increase all DA 59 feet and all MDA 60 feet, increase LNAV and Circling Cat C visibility ¼ mile. Rwy 14 Straight-in and Circling and Circling to Rwy 32 NA at night.

MISSED APPROACH: Climb to 2700 direct CIMOD and hold.

AWOS-3 118.375	KANSAS CITY CENTER 126.225 317.775	UNICOM 122.8 (CTAF) 1
--------------------------	--	---------------------------------

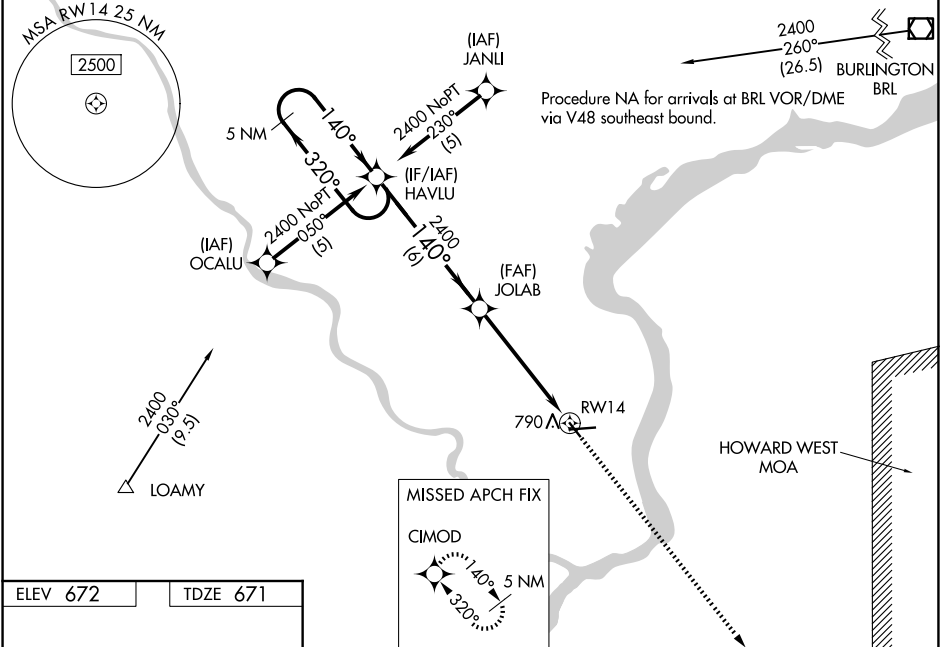

ELEV 672

TDZE 671

REIL Rwys 8, 14, and 32 1

MIRL Rwys 8-26 and 14-32 1

5 NM Holding Pattern				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 36).		2700	CIMOD
CATEGORY				A	B	C	D
LPV DA				949-1	278 (300-1)		NA
LNAV/VNAV DA				1040-1¼	369 (400-1¼)		NA
LNAV MDA				1040-1	369 (400-1)		NA
CIRCLING				1180-1 508 (600-1)	1220-1 548 (600-1)	1220-1½ 548 (600-1½)	NA