

WAAS CH 56430 W06A	APP CRS 058°	Rwy Ldg 6006 TDZE 186 Apt Elev 213
--	------------------------	---

RNAV (GPS) Z RWY 6
TRENTON MERCER (TTN)

RNP APCH - GPS.


⚠ Baro-VNAV and VDP NA when using Northeast Philadelphia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. When local altimeter setting not received, use Northeast Philadelphia altimeter setting and increase LPV DA to 437 feet; increase LNAV/VNAV DA to 658 feet and all visibilities ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV visibility Cats C/D to 1 ½. For inop ALS when using Northeast Philadelphia altimeter setting, increase LNAV/VNAV all Cats visibility to 1 ½ and LNAV visibility Cats C/D to 1 ½. When Circling to Rwy 34 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MALS



MISSED APPROACH:
Climb to 1500 then climbing left turn to 2700 direct ZUBAX and hold.

ATIS 126.775	PHILADELPHIA APP CON 123.8 291.7	TRENTON TOWER ★ 120.7 (CTAF) 0 257.8	GND CON 121.9 257.8	UNICOM 122.95
------------------------	--	--	-------------------------------	-------------------------

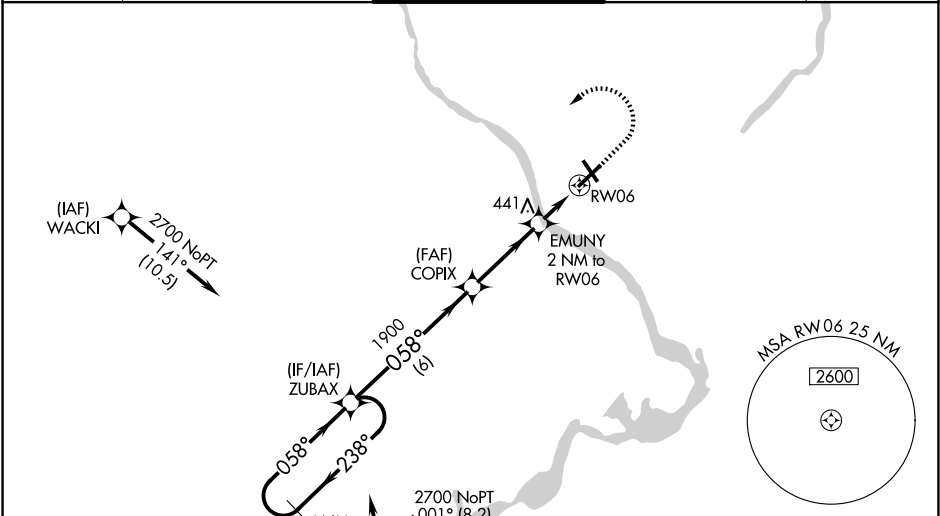

4 NM Holding Pattern		ZUBAX		COPIX		EMUNY 2 NM to RWY 06		ZUBAX	
2700		238°		058°		1900		1500	
GP 3.00°		058°		058°		*840		* LNAV only.	
TCH 60		6 NM		3.3 NM		0.5 NM		1.5 NM	
CATEGORY	A	B	C	D					
LPV DA	390-½				204 (200-½)				
LNAV/VNAV DA	611-¾				425 (400-¾)				
LNAV MDA	700-½	514 (500-½)	700-1	514 (500-1)					
CIRCLING	700-1	487 (500-1)	760-1½	960-2½					
			547 (600-1½)	747 (800-2½)					

ELEV 213 D TDZE 186