

WAAS CH 69503 W27A	APP CRS 274°	Rwy Ldg 6122 TDZE 812 Apt Elev 812
--	------------------------	---

RNAV (GPS) RWY 27
ATHENS/BEN EPPS (AHN)

RNP APCH - GPS.



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C.
 When local altimeter setting not received, use Winder altimeter setting: increase LPV DA to 1071 feet, increase LNAV/Cats visibility to 1 mile, increase LNAV/Cats D visibility to 1/2 mile, increase LNAV/VNAV all Cats visibility to 1/2 mile, increase LNAV/Cats D visibility to 1 mile. For inop MALSF, increase LNAV/VNAV all Cats visibility to 1/2 mile, increase LNAV/Cats D visibility to 1 mile. For inop MALSF when using Winder altimeter setting increase LPV all Cats visibility to 1/2 mile, increase LNAV/VNAV all Cats visibility to 1 mile, increase LNAV/Cats D visibility to 1/2 mile. Baro-VNAV and VDP NA when using Winder altimeter setting. Inop table does not apply to LPV. Circling Rwy 2, 20 NA at night.

MALSF



MISSED APPROACH:
Climb to 2500 direct
SALIN and hold.

ASOS 132.875	ATLANTA APP CON ★ 132.475 291.1	ATHENS TOWER ★ 126.3 (CTAF) 0 338.275	GND CON 121.8	UNICOM 122.95
-----------------	------------------------------------	--	------------------	------------------

MISSED APCH FIX

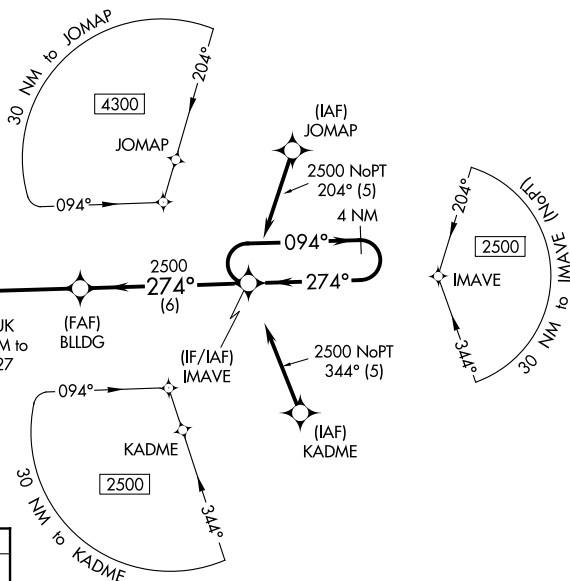

ELEV 812		TDZE 812
----------	--	----------

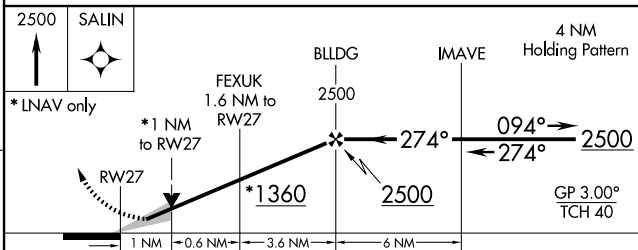

CATEGORY	A	B	C	D
LPV DA	1012- ³ / ₄ 200 (200- ³ / ₄)			
INAV/ VNAV DA	1064- ³ / ₄ 252 (300- ³ / ₄)			
INAV MDA	1160- ³ / ₄ 348 (400- ³ / ₄)			
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)