


WAAS CH 78001 W32A	APP CRS 317°	Rwy Ldg 7120 TDZE 102 Apt Elev 107
---------------------------------	------------------------	---

RNAV (GPS) RWY 32
MC ALLEN INTL (MFE)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). Circling NA northeast of Rwy 14-32. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Weslaco altimeter setting: increase all DA 39 feet and LNAV/VNAV all Cat visibility ¼ mile; increase all MDA 40 feet and LNAV Cat C/D visibility ½ mile. Baro-VNAV and VDP NA when using Weslaco altimeter setting.

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct SANCA and hold.

ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER * 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95
----------------------	---------------------------------------	---	-------------------------	-------------------------

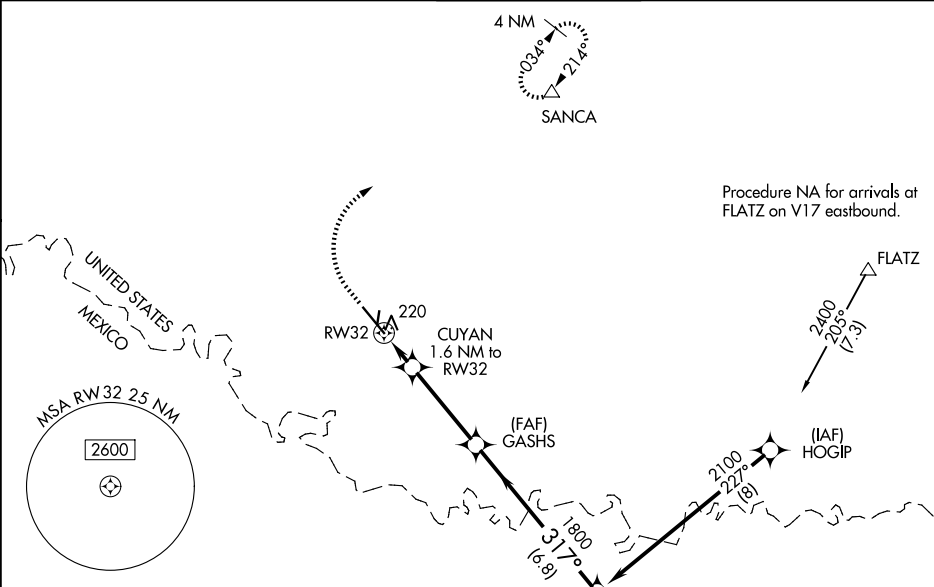

ELEV 107	D	TDZE 102
----------	----------	----------

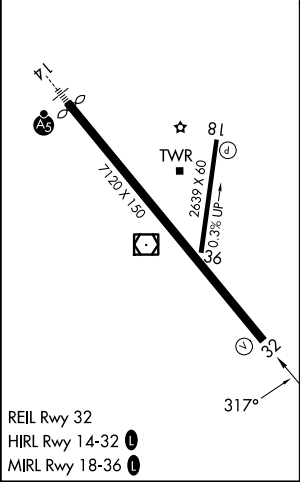

800	2000	SANCA	△	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 53).
*LNAV only				
FOVUD				
GASHS				
CUYAN 1.6 NM to RW32				
*1 NM to RW32				
RW32				
*660				
1800				
2100				
GP 3.00°				
TCH 50				
1 NM 0.6 3.6 NM 6.8 NM				
CATEGORY	A	B	C	D
LPV DA	302-¾ 200 (200-¾)			
LNAV/VNAV DA	391-⅞ 289 (300-⅞)			
LNAV MDA	480-1 378 (400-1)			
CIRCLING	580-1 473 (500-1)		580-1½ 473 (500-1½)	800-2¼ 693 (700-2¼)

SC-3, 25 DEC 2025 to 22 JAN 2026

SC-3, 25 DEC 2025 to 22 JAN 2026