


WAAS CH 53617 W14A	APP CRS 139°	Rwy Idg 5608 TDZE 21 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 14
ARANSAS COUNTY (RKP)


Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet increase LNAV/VNAV all Cats visibility ¼ mile. VDP NA with Ingleside altimeter setting.

MISSED APPROACH:
Climb to 2000 direct PITYI and hold.

ASOS 119.275	CORPUS APP CON 120.9 348.725	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	--	--------------------------	----------------------------------

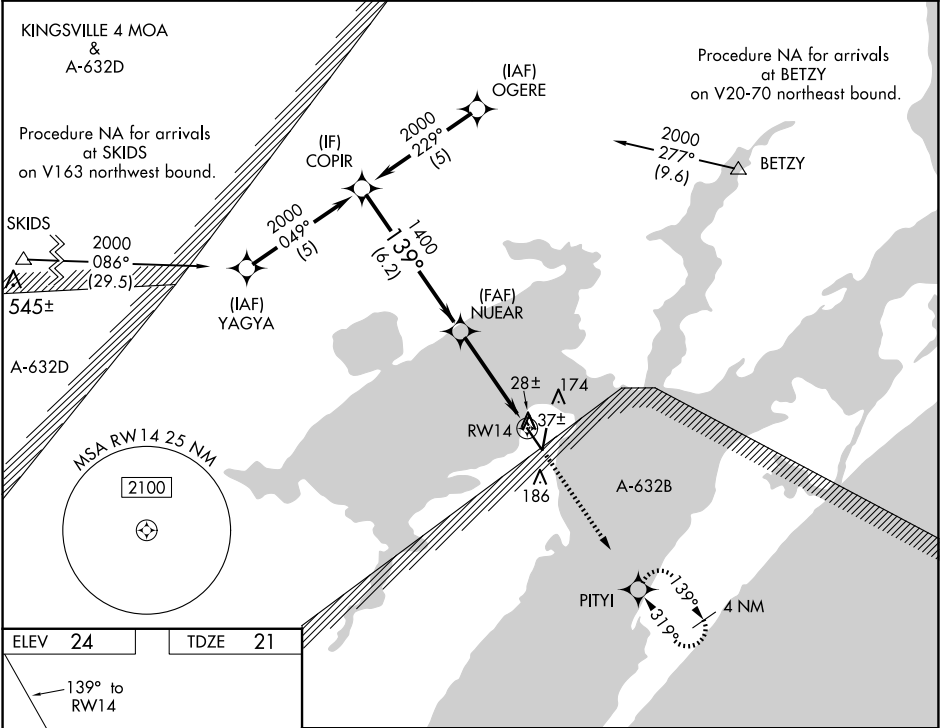

ELEV 24	TDZE 21
----------------	----------------

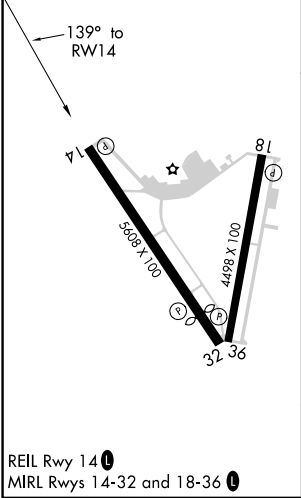

Procedure	Turn NA	COPIR	* LNAV only	2000	PITYI
	2000	NUEAR	1400		
	GP 3.00°	1400	* 0.9 NM to RWY 14	RWY 14	
		6.2 NM	3.3 NM	0.9 NM	
CATEGORY	A	B	C	D	
LPV DA	271-1	250 (300-1)		NA	
LNAV/VNAV DA	378-1¼	357 (400-1¼)		NA	
LNAV MDA	320-1	299 (300-1)		NA	
CIRCLING	500-1	476 (500-1)	500-1½	476 (500-1½)	NA

SC-3, 25 DEC 2025 to 22 JAN 2026

SC-3, 25 DEC 2025 to 22 JAN 2026