


WAAS CH 45917 W32A	APP CRS 319°	Rwy Idg 5608 TDZE 24 Apt Elev 24
--	------------------------	---


RNAV (GPS) RWY 32
ARANSAS COUNTY (RKP)

T Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet, increase LNAV Cat C visibility ¼ mile. VDP NA with Ingleside altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
COPIR and hold.


ASOS	CORPUS APP CON	CLNC DEL	UNICOM
119.275	120.9 348.725	121.7	123.05 (CTAF) 

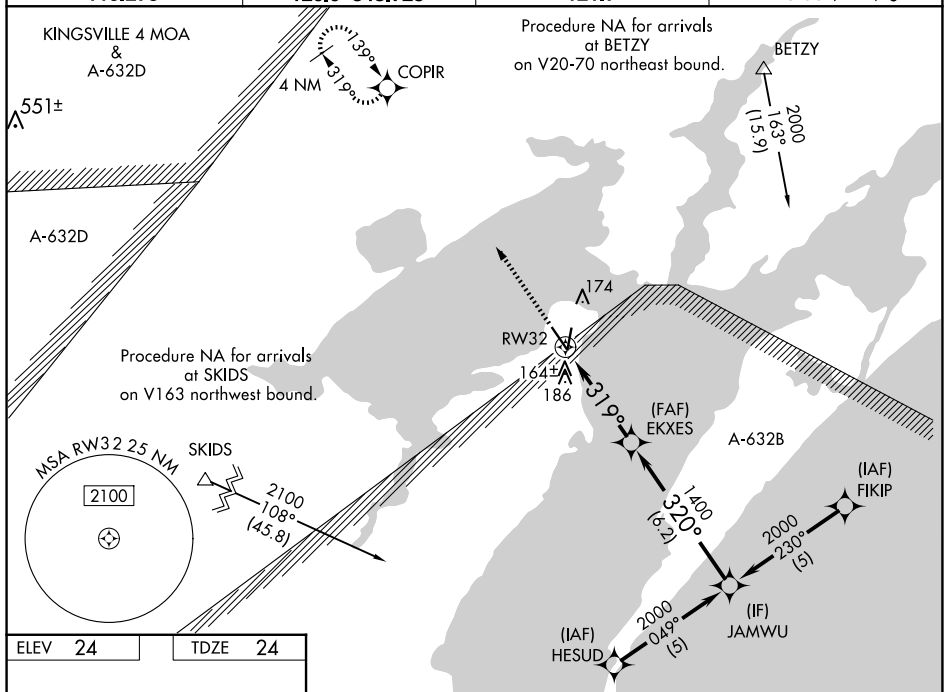

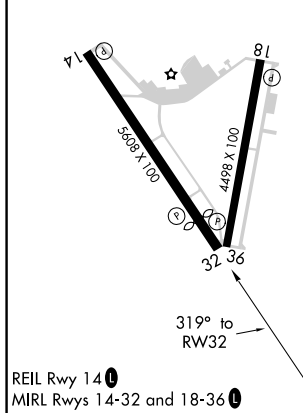

2000 ↑	COPR 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).	Procedure Turn NA
-----------	---	--	----------------------

* LNAV only

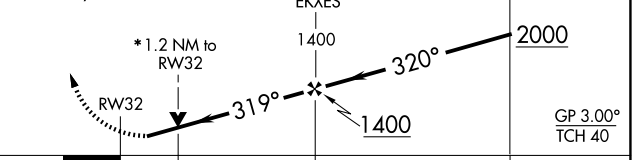

CATEGORY		A		B		C		D	
LPV	DA	274-1		250 (300-1)				NA	
LNAV/ VNAV	DA	508-1¾		484 (500-1¾)				NA	
LNAV	MDA	420-1		396 (400-1)				NA	
CIRCLING		500-1		476 (500-1)		500-1½ 476 (500-1½)		NA	