

WAAS CH 48940 W13A	APP CRS 129°	Rwy Idg TDZE Apt Elev	5012 54 55
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 13

KNOX COUNTY RGNL (RKD)

▼


▲

DME/DME RNP -0.3 NA. VDP and Baro-VNAV NA when using Wiscasset altimeter setting. When local altimeter setting not received, use Wiscasset altimeter setting and increase LPV DA to 319 feet, LNAV/VNAV DA to 467 feet and all MDA 80 feet. Increase LNAV/VNAV visibility all Cats to 1 SM, LNAV Cat C/D to 1 SM and Circling Cat C to 2 ¼ SM. For inop ALS increase LNAV/VNAV all Cats visibility to 1 ½ SM. For inop ALS when using Wiscasset altimeter setting increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1 ¾ SM and LNAV Cat C/D to 1 ¾ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).

MALSR

MISSED APPROACH:
Climb to 800 then
climbing right turn to
2400 direct AVMAW
and hold.

AWOS-3PT 119.025	PORTLAND APP CON ★ 120.4 299.2	CLNC DEL 123.8	UNICOM 123.05 (CTAF) 0
----------------------------	--	--------------------------	----------------------------------

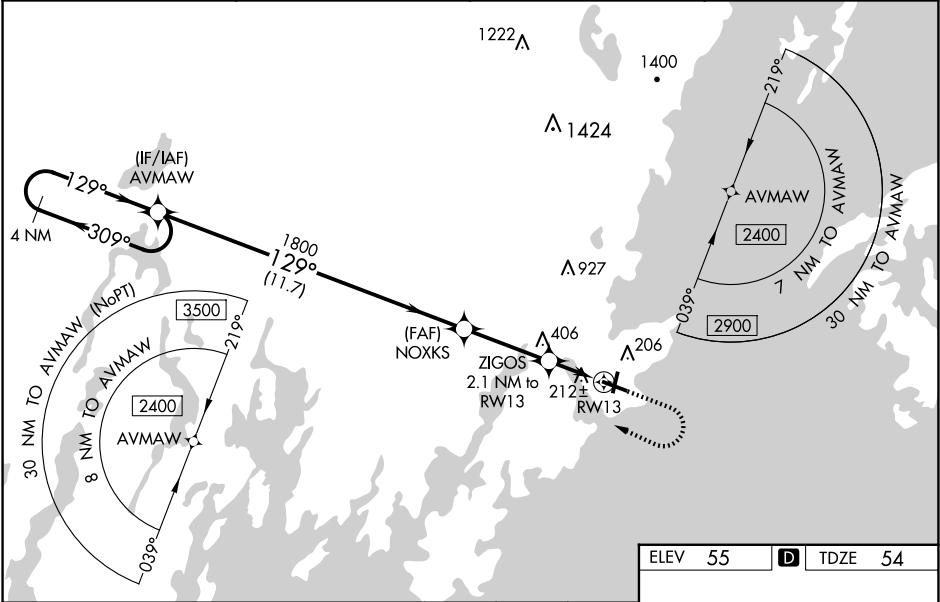

4 NM Holding Pattern		AVMAW	NOXKS	ZIGOS	RWY 13
2400 ← 309°		129° →	1800	2.1 NM to RWY 13	
GP 3.00° TCH 51		129°	*740	*1.2 NM to RWY 13	
		11.7 NM	3.3 NM	0.9 NM	1.2 NM
CATEGORY	A	B	C	D	
LPV DA	254-½		200 (200-½)		
LNAV/VNAV DA	402-¾		348 (400-¾)		
LNAV MDA	480-½	426 (500-½)	480-¾	426 (500-¾)	
CIRCLING	580-1	525 (600-1)	720-1¾ 665 (700-1¾)	1140-3 1085 (1100-3)	

ELEV 55 D TDZE 54

800

2400

AVMAW

*LNAV only

REIL Rwy 3 and 31 0
MIRL Rwy 3-21 0
HIRL Rwy 13-31 0