

LOC I-AYS	APP CRS	Rwy Ldg	5992
108.3	184°	TDZE	140
		Apt Elev	141

ILS Z or LOC Z RWY 19


WAYCROSS-WARE COUNTY (AYS)

▼ ADF Required. When local altimeter setting not received, use Alma altimeter setting: increase DA to 390 feet and all MDA 60 feet; increase S-LOC 19 Cat C/D visibility ½ mile; increase Circling Cat C/D visibility ¼ mile. For inop MALSR, increase S-LOC 19 Cat C/D visibility to 1 mile. For inop MALSR when using Alma altimeter setting, increase S-LOC 19 Cat C/D visibility to 1½ mile. Increase SHOGI Fix Minimums S-LOC 19 Cat C/D visibility to 1½ mile. Night Landing Rwy 5, 31 NA.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 1700 direct WIKET LOM and hold.

AWOS-3 118.575	JACKSONVILLE CENTER 127.575 269.025	UNICOM 122.8 (CTAF) 0
-------------------	--	--------------------------

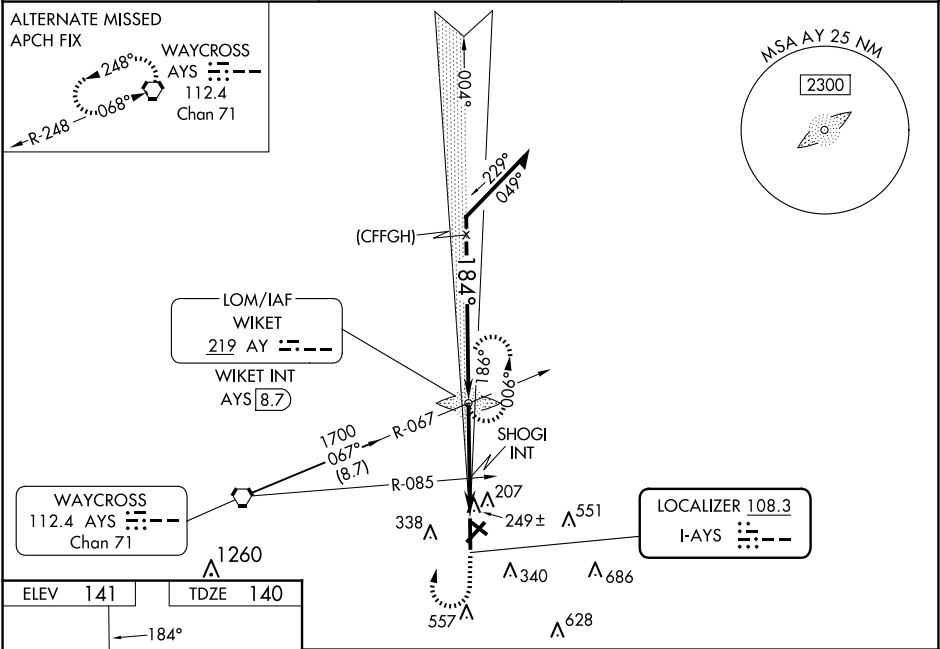

800 1700 AY

WIKET LOM/INT

Remain within 10 NM

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).

*LOC only.

*600

*660 when using Alma altimeter setting.

1.5 NM 2.7 NM

CATEGORY	A	B	C	D
S-ILS 19	340-½	200 (200-½)		
S-LOC 19	600-½	460 (500-½)	600-¾	460 (500-¾)
CIRCLING	660-1 519 (600-1)	720-1 579 (600-1)	860-2 719 (800-2)	860-2¼ 719 (800-2¼)
SHOGI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 19	500-½	360 (400-½)	500-¾	360 (400-¾)
CIRCLING	660-1 519 (600-1)	720-1 579 (600-1)	860-2 719 (800-2)	860-2¼ 719 (800-2¼)