



WAAS CH 99440 W19B	APP CRS 193°	Rwy Ldg TDZE 124 Apt Elev 129
--	------------------------	---

RNAV (GPS) RWY 19L

BETHEL (BET)(PABE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA. MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct ROLLR and hold.
--

ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7
----------------------	--	---	-------------------------

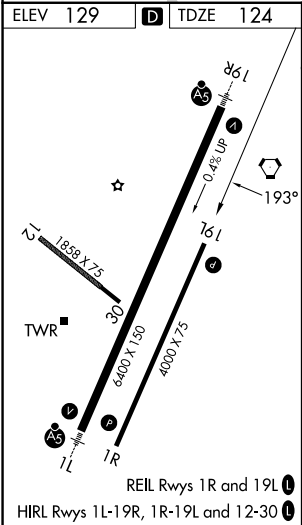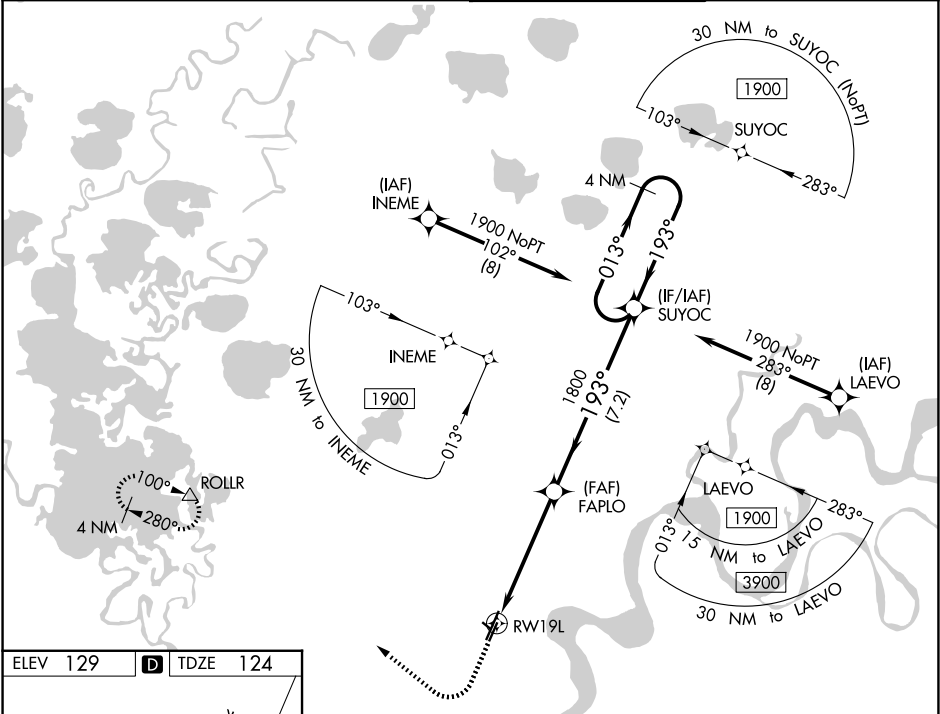

600	2000	ROLLR	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 32).			
*LNAV only		FAPLO	SUYOC	4 NM Holding Pattern		
*1.1 NM to RWY 19L		1800	193°	013°	1900	GP 3.00° TCH 50
-1.1		4 NM	7.2 NM			
CATEGORY	A	B	C	D		
LPV DA	374-¾ 250 (300-¾)					
LNAV/VNAV DA	374-¾ 250 (300-¾)					
LNAV MDA	500-1 376 (400-1)					
CIRCLING	500-1 371 (400-1)	600-1 471 (500-1)	600-1½ 471 (500-1½)	680-2 551 (600-2)		