

WAAS CH 42528 W24A	APP CRS 238°	Rwy Idg TDZE 873 Apt Elev 876
--	------------------------	---

RNAV (GPS) RWY 24
CUYAHOGA COUNTY (C'GT')


RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C . For inop ALS increase LNAV/VNAV visibility all Cats to 7/8 SM, LNAV Cat C, D to 1 1/8 SM.


MALSR

MISSED APPROACH:
Climb to 2500 then climbing left turn to 3000 direct ZUPKO and hold.

D-ATIS 119.95	CLEVELAND APP CON 125.35 346.325	COUNTY TOWER★ 118.5 (CTAF) 0	GND CON 121.85	CLNC DEL 121.85 (when tower closed)
-------------------------	--	--	--------------------------	--

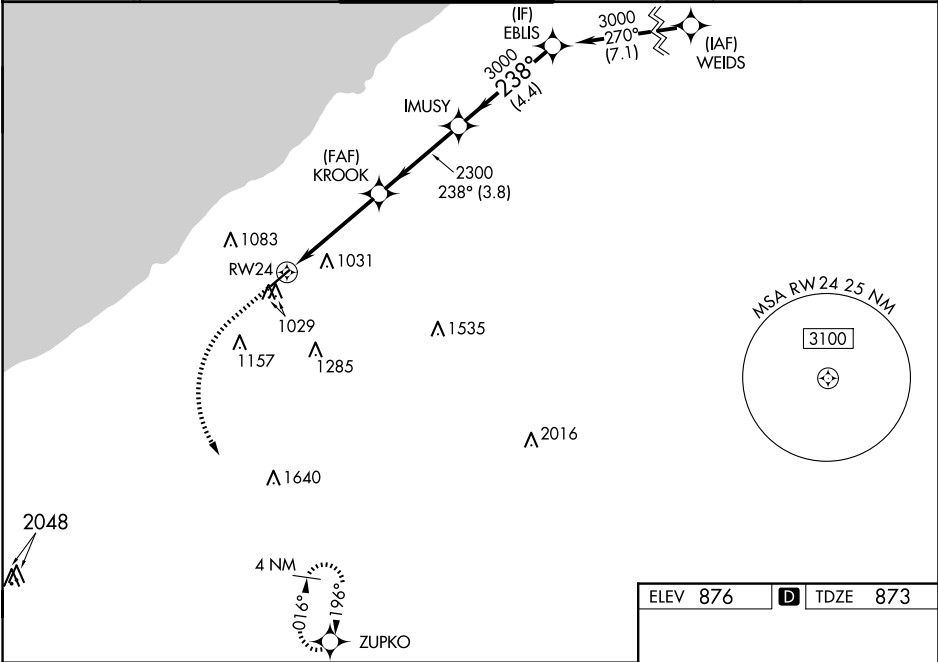

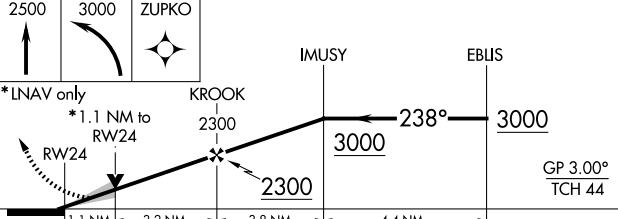2500 ↑	3000 	ZUPKO 	 The chart shows a departure from RW24. A dashed line indicates the initial climb, with a note '*1.1 NM to RW24'. The path then becomes solid. Key points include KROOK at 2300, IMUSY, and EBUS. Distances are marked: 1.1 NM, 3.2 NM, 3.8 NM, and 4.4 NM. Altitudes are 2300, 3000, and 3000. A heading of 238° is shown. The chart also includes a GP 3.00° and TCH 44.			
CATEGORY		A	B		C	D
LPV	DA	1073-½ 200 (200-½)				
LNAV/ VNAV	DA	1178-½ 305 (400-½)				
LNAV MDA	1280-½ 407 (500-½)			1280-¾ 407 (500-¾)		
 CIRCLING	1400-1 524 (600-1)		1500-1 624 (700-1)		1560-2 684 (700-1)	1620-2½ 744 (800-2½)

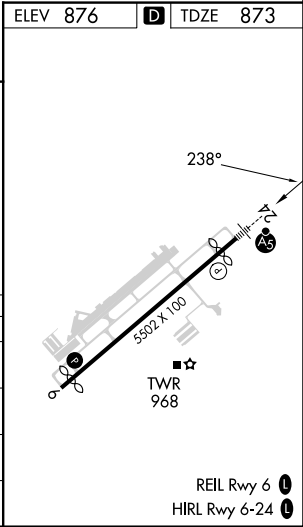

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026