


WAAS CH 99341 W21A	APP CRS 214°	Rwy Ldg TDZE Apt Elev	7000 7003 7014
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 21
FLAGSTAFF PULLIAM (F'L.G)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19 °C (2°F) or above 44°C (111°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to ¾ SM.	MALSR A5	MISSED APPROACH: Climb to 7500 then climbing left turn to 10800 direct HOXOL and hold.
---	-------------------------------	---

ATIS 125.8	PHOENIX APP CON 126.375 236.775	FLAGSTAFF TOWER ★ 134.55 (CTAF) 239.25	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

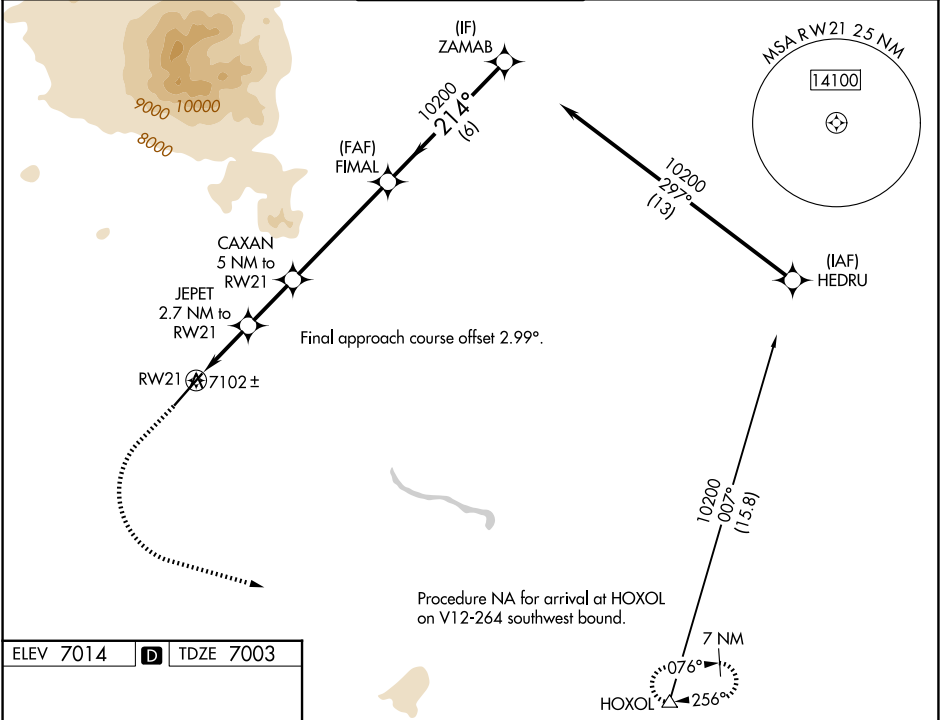

ELEV 7014	D	TDZE 7003
-----------	----------	-----------

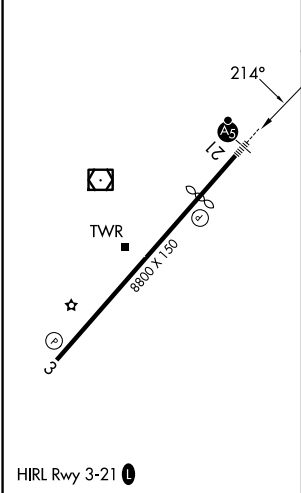

	7500	10800	HOXOL		FIMAL	ZAMAB
	↑	↶	△		↶	↶
	*LNAV only		*1 NM to RW21	JEPET 2.7 NM to RW21	CAXAN 5 NM to RW21	
	RW21		7900*	8640*	10200	10200
	1 NM		1.7 NM	2.3 NM	4.9 NM	6 NM
CATEGORY	A		B		C	D
LPV DA	7258-½		255 (300-½)			
LNAV/VNAV DA	7319-⅝		316 (400-¾)			
LNAV MDA	7360-½		357 (400-½)		7360-⅝ 357 (400-¾)	
CIRCLING	7520-1 506 (600-1)		7560-1 546 (600-1)		8100-3 1086 (1100-3) 8560-3 1546 (1600-3)	