

WAAS
CH **90202**
W13A

APP CRS
133°

Rwy Ldg
TDZE **1280**
Apt Elev **1317**

RNAV (GPS) RWY 13


ROCHESTER INTL (RST)

RNP APCH - GPS.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 2900 direct POKYI and on track 241° to RST VOR/DME and hold.

ATIS 120.5	ROCHESTER APP CON★ 119.8 251.125	ROCHESTER TOWER★ 118.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

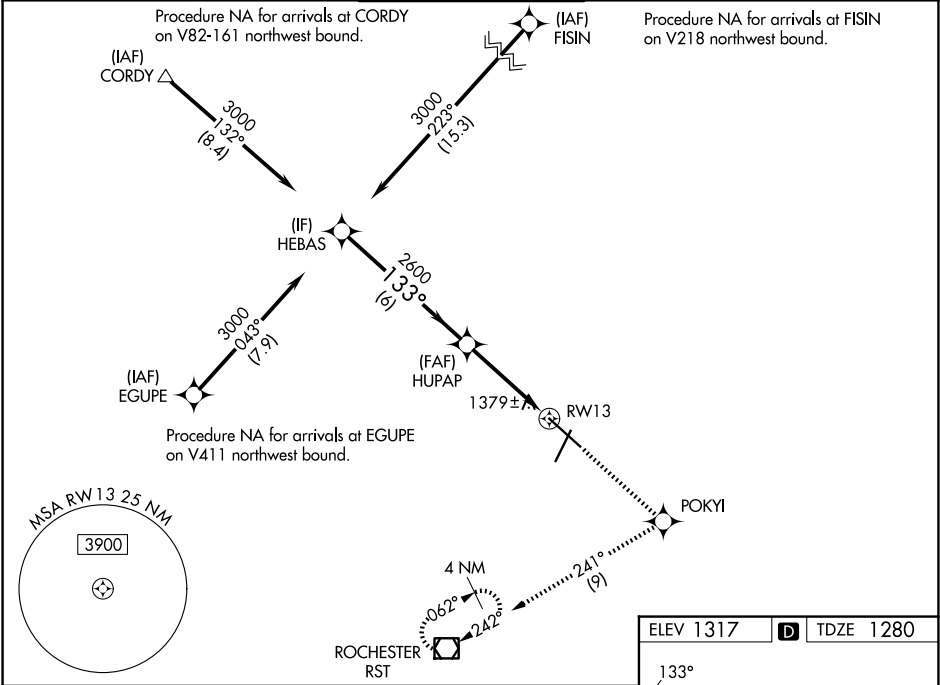

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 53).

HEBAS

HUPAP

POKYI

RST

3000

2600

133°

2600

1 NM to RW13

RW13

GP 3.00°

TCH 53

6 NM

3 NM

1 NM

CATEGORY	A	B	C	D
LPV DA	1530/18 250 (300-½)			
LNAV/ VNAV DA	1679/50 399 (400-1)			
LNAV MDA	1640/24 360 (400-½)	1640/30 360 (400-¾)	1640/50 360 (400-1)	
CIRCLING	1720-1 403 (500-1)	1780-1 463 (500-1)	1900-1½ 583 (600-1½)	1900-2 583 (600-2)

ELEV 1317

D

TDZE 1280

133°

AS

0.4% UP

0.4% UP

0.4% UP

0.4% DOWN

31

3

HIRL Rwy 13-31

MIRL Rwy 3-21

REIL Rws 3 and 21

TDZL/RCLS Rws 13 and 31