

WAAS CH 69621 W03A	APP CRS 027°	Rwy Ldg 7300 TDZE 1317 Apt Elev 1317
--	------------------------	---

RNAV (GPS) RWY 3

ROCHESTER INTL (RST)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 54°C.

MISSED APPROACH: Climb to 3400 direct BOCAG and hold, continue climb-in-hold to 4800.

ATIS 120.5	ROCHESTER APP CON ★ 119.8 251.125	ROCHESTER TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------


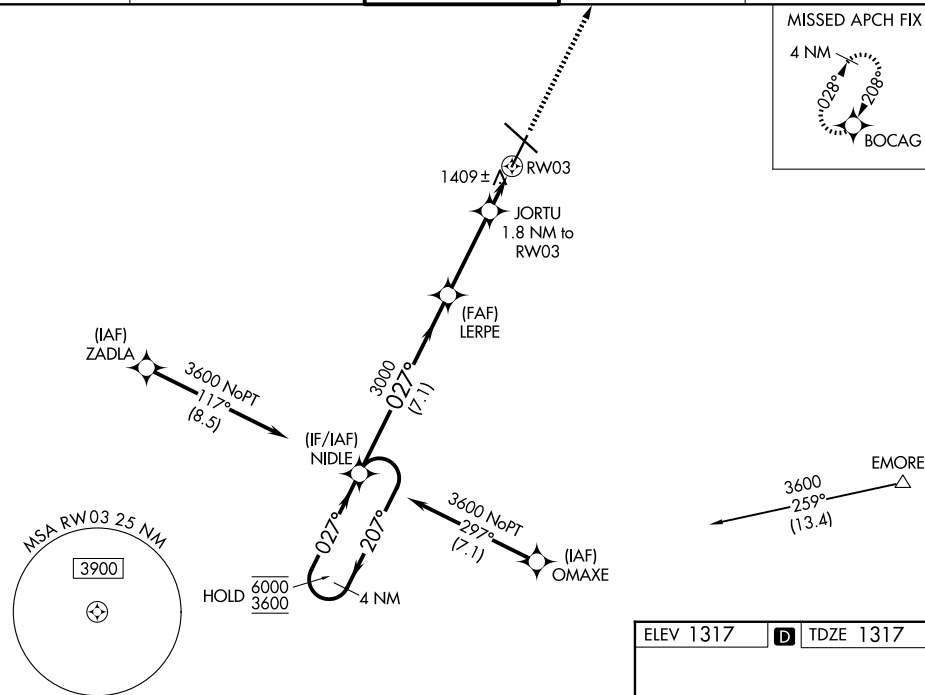


Figure 6-10 Example of a complex RNAV approach chart.

CATEGORY	A	B	C	D
LPV DA	1567-1 250 (300-1)			
LNAV/VNAV DA	1592-1 275 (300-1)			
LNAV MDA	1660-1 343 (400-1)			
CIRCLING	1720-1 403 (500-1)	1780-1 463 (500-1)	1900-1½ 583 (600-1½)	1900-2 583 (600-2)

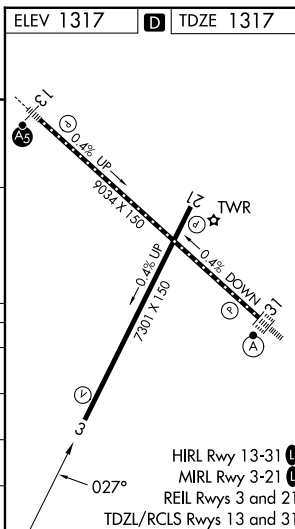

RNAV (GPS) RWY 3