



WAAS CH 60900 W36A	APP CRS 004°	Rwy Idg 7000 TDZE 62 Apt Elev 83
--	------------------------	---


RNAV (GPS) RWY 36

TALLAHASSEE INTL (TLH)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 3000 direct CIGAY and hold, continue climb-in-hold to 3000.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. ▲ For inop ALS, increase LNAV/VNAV all Cts visibility to RVR 4500. ASR * RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 119.45 239.25	TALLAHASSEE APP CON * 135.8 317.4	TALLAHASSEE TOWER * 118.7 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 126.65 275.8	UNICOM 123.075
------------------------------	---	--	-------------------------------	---------------------------------	--------------------------

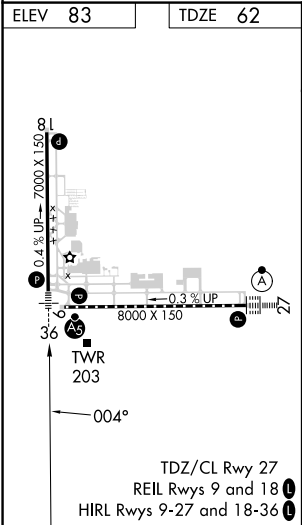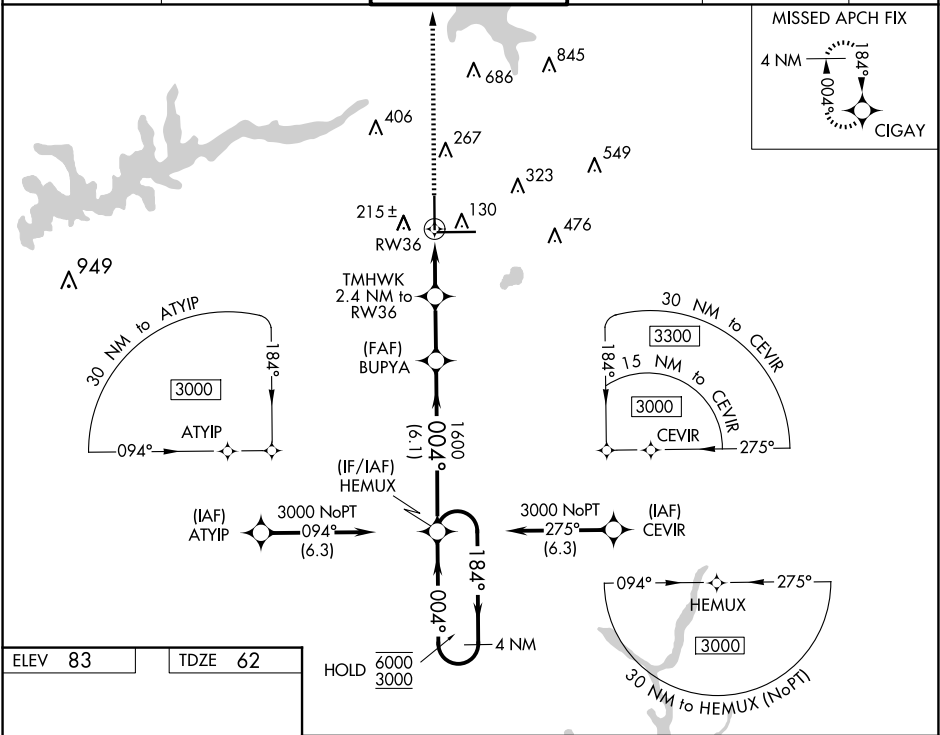

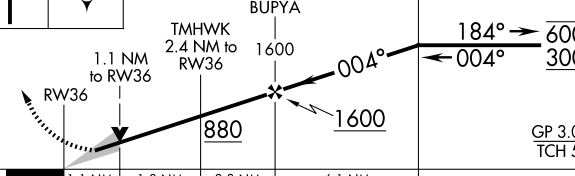3000	CIGAY	4 NM Holding Pattern			
					
					
CATEGORY	A	B	C	D	
LPV DA *	262/24		200 (200-½)		
LNAV/VNAV DA	364/24		302 (300-½)		
LNAV MDA	460/24 398 (400-½)		460/35 398 (400-½)		
 CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)	