

ATIS 125.025
 CLNC DEL 118
 GND CON 12
 PONTIAC TOW
 120.5 (CTAF)

TAKEOFF MINIMUMS

Rwys 18, 36: NA - Environmental.
Rwys 9L/R, 27L/R: Standard.

RADAR required. DME required.

TOP ALTITUDE:
3000

NOTE: For use by non-RNAV equipped aircraft only.

NOTE: When using this departure, file the appropriate depicted departure fix and route. Aircraft over HARWL must file FL220 and below. Aircraft land Cleveland (CLE) must file MAARS transition.

Turbojet departures at/above 10000, maintain 280K until advised by ATC. If unable, advise ATC prior to departure.


SPECIAL INSTRUCTIONS:

For appropriate departure control frequency, see graphic.
Use frequency depicted within the sector where first
manoid/fix for your route is located (sectors indicated by
dashed lines; frequencies in dashed box within)

(CONTINUED ON FOLLOWING PAGE)

EC-1, 25 DEC 2025 to 22 JAN 2026

NOTE: Chart not to scale.

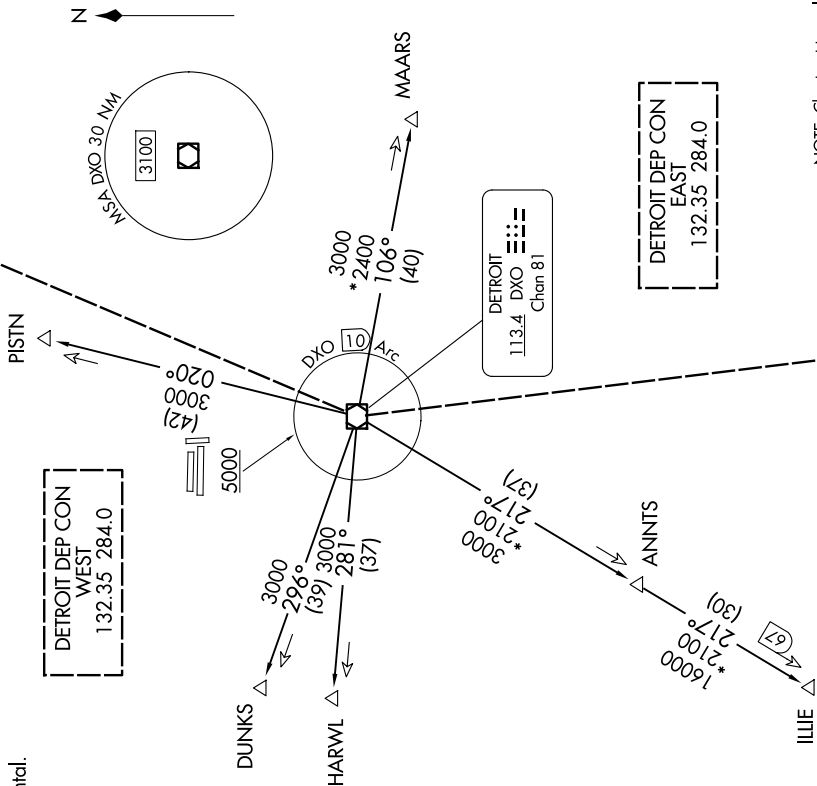

METRO FOUR DEPARTURE

(METRO4.DXO) 05SEP24

PONTIAC, MICHIGAN

OAKLAND COUNTY INTL (PTK)