

DME required.

▼


▲

For inop ALS, increase S-36 Cats A/B visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 2000 on OCF VORTAC R-355 to JODON/OCF VORTAC 16 DME and hold.

ATIS 128.125	JACKSONVILLE APP CON 118.6 251.15	OCALA TOWER ★ 119.25 (CTAF) 0	GND CON 121.4
-----------------	--------------------------------------	----------------------------------	------------------

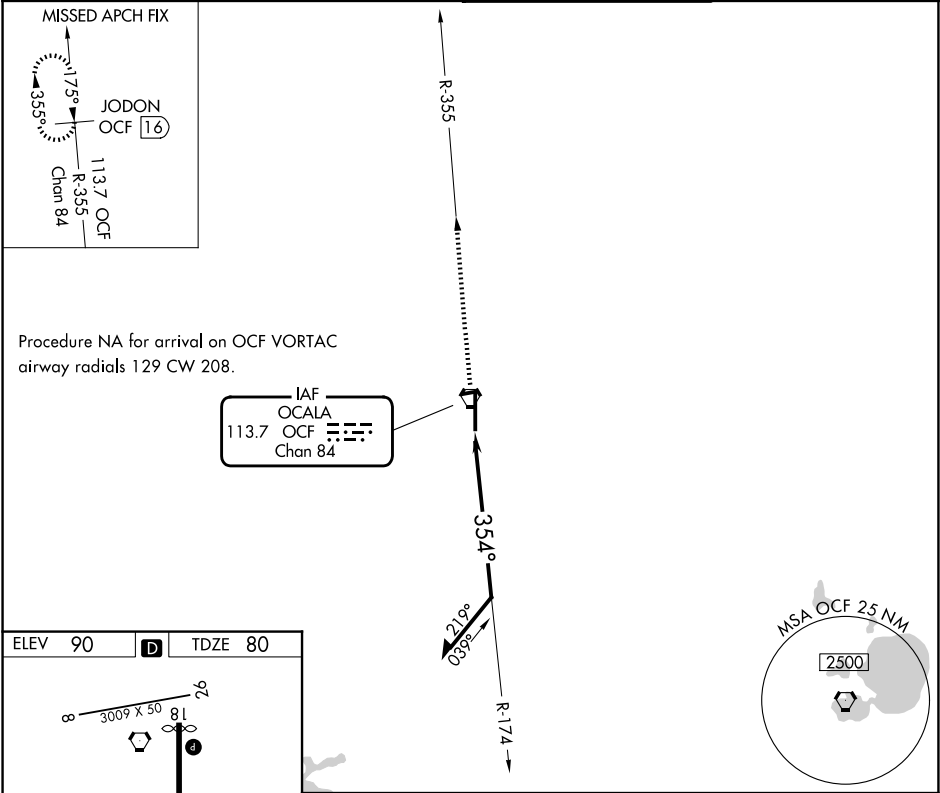

ELEV 90

D

TDZE 80

2000

JODON OCF 16

OCF R-355

OCF VORTAC

174°

1700

OCF 2.7

354°

1.6

Remain within 10 NM

CATEGORY	A	B	C	D
S-36	640-3/4	560 (600-3/4)	640-1 1/8	560 (600-1 1/8)
CIRCLING	640-1	550 (600-1)	760-1 3/4 670 (700-1 3/4)	920-2 3/4 830 (900-2 3/4)