

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>78029</b><br><b>W18A</b> | APP CRS<br><b>185°</b> | Rwy Ldg <b>5264</b><br>TDZE <b>777</b><br>Apt Elev <b>777</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|



RNAV (GPS) RWY 18

AUBURN UNIVERSITY RGNL (AUO)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).  
Baro-VNAV and VDP NA when using Columbus altimeter setting. DME/DME RNP-0.3 NA. Rwy 18  
helicopter visibility reduction below ¾ SM not authorized. When local altimeter setting not received, use  
Columbus altimeter setting: increase LPV DA to 1140 feet and visibility all Cats ½ SM; increase  
LNAV/VNAV DA to 1164 feet and visibility all Cats ¾ SM; increase all MDA 120 feet and LNAV Cats  
C/D visibility ¾ SM, Circling Cat C visibility ¼ SM, and circling Cat D visibility ½ SM.

MISSED APPROACH:  
Climb to 3000 direct  
HESEL and hold.

|                            |                                         |                                                  |                             |                        |
|----------------------------|-----------------------------------------|--------------------------------------------------|-----------------------------|------------------------|
| AWOS-3PT<br><b>132.575</b> | ATLANTA APP CON ★<br><b>125.5 323.1</b> | AUBURN TOWER ★<br><b>123.875</b> (CTAF) <b>0</b> | GND CON ★<br><b>121.625</b> | UNICOM<br><b>123.0</b> |
|----------------------------|-----------------------------------------|--------------------------------------------------|-----------------------------|------------------------|

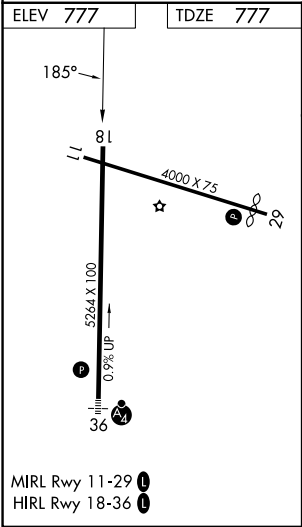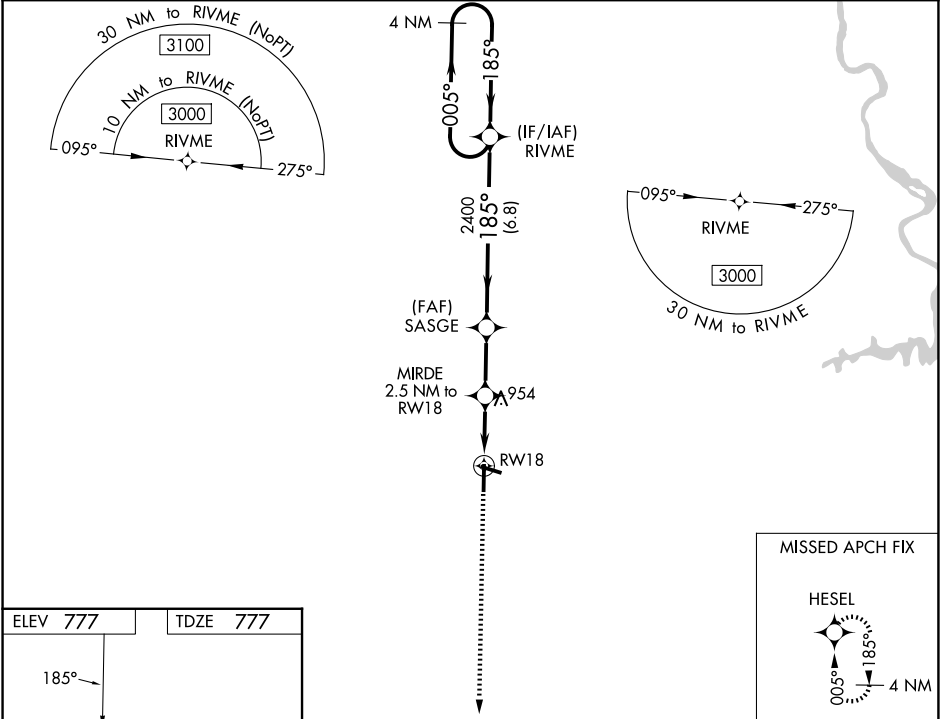

|                  |                       |                            |                         |                                  |
|------------------|-----------------------|----------------------------|-------------------------|----------------------------------|
| 3000             | HESEL                 | MIRDE<br>2.5 NM to<br>RW18 | SASGE<br>2400           | RIVME<br>4 NM<br>Holding Pattern |
| *LNAV only       | *1.4 NM to<br>RW18    | 1.4 NM                     | 1.1 NM                  | 2.4 NM                           |
|                  |                       | 1620*                      | 2400                    | 3000                             |
|                  |                       |                            | 6.8 NM                  |                                  |
| CATEGORY         | A                     | B                          | C                       | D                                |
| LPV DA           | 1027-¾                | 250 (300-¾)                |                         |                                  |
| LNAV/<br>VNAV DA | 1051-⅞                | 274 (300-⅞)                |                         |                                  |
| LNAV MDA         | 1260-1                | 483 (500-1)                | 1260-1⅜                 | 483 (500-1⅜)                     |
| CIRCLING         | 1280-1<br>503 (600-1) | 1360-1<br>583 (600-1)      | 1380-1¾<br>603 (700-1¾) | 1480-2¼<br>703 (800-2¼)          |