

LOC I-AID <u>110.1</u>	APP CRS 298°	Rwy Idg 5320 TDZE 919 Apt Elev 919
----------------------------------	------------------------	---

ILS or LOC RWY 30
ANDERSON RGNL (AID)


ADF required.
RADAR required for procedure entry.

MALSF

MISSED APPROACH: Climb to 2200 then climbing right turn to 2900 direct VIDEO LOM/RADAR and hold.

T Rwy 30 helicopter visibility reduction below $\frac{3}{4}$ SM NA.
A For inop ALS, increase S-ILS 30 all Cats visibility to $\frac{7}{8}$ SM.

AWOS-3 128.55	INDIANAPOLIS APP CON 120.65 317.8	ANDERSON TOWER ★ 126.0 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-------------------------	---	---	-------------------------	-------------------------

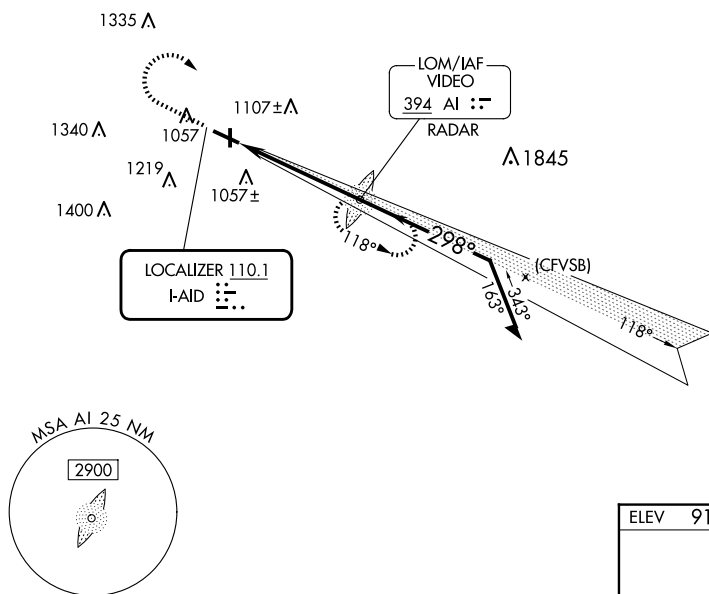

CATEGORY	A	B	C	D
S-ILS 30	1209- $\frac{3}{4}$ 290 (300- $\frac{3}{4}$)			
S-LOC 30	1440- $\frac{3}{4}$ 521 (600- $\frac{3}{4}$)		1440-1 $\frac{1}{4}$ 521 (600-1 $\frac{1}{4}$)	
C CIRCLING	1440-1 521 (600-1)		1520-1 $\frac{3}{4}$ 601 (700-1 $\frac{3}{4}$)	1520-2 601 (700-2)

