

|             |         |          |      |
|-------------|---------|----------|------|
| VOR/DME EHK | APP CRS | Rwy Ldg  | 8653 |
| 117.3       | 177°    | TDZE     | 5605 |
| Chan 120    |         | Apt Elev | 5622 |


VOR RWY 20  
CEDAR CITY RGNL (CDC)

**⚠** Circling NA southeast of Rwy 2-20.  
For inop ALS S-20\* increase Cat C/D  
visibility to 1½ SM.

**MALSR**

**MISSED APPROACH:** Climbing right turn to 11500 on heading 322° and on EHK VOR/DME R-278 to BERYL INT/EHK 16.5 DME and hold, continue climb-in-hold to 11500.  
\*Missed approach requires minimum climb of 247 feet per NM to 7500.

|                 |                                          |                        |
|-----------------|------------------------------------------|------------------------|
| ASOS<br>119.025 | SALT LAKE CITY CENTER<br>125.575 379.275 | UNICOM<br>123.0 (CTAF) |
|-----------------|------------------------------------------|------------------------|

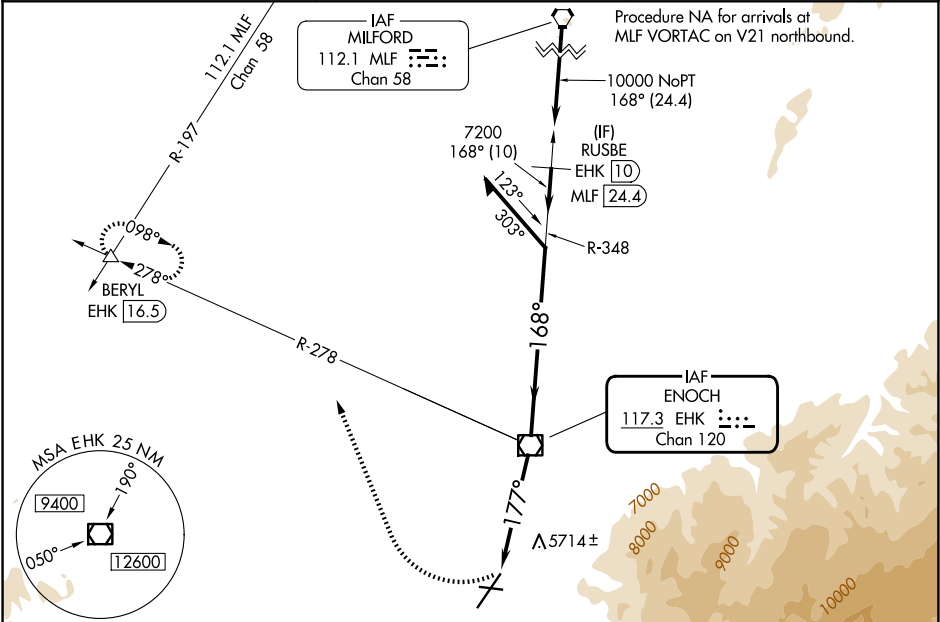

ELEV 5622 **D** TDZE 5605

HIRL Rwy 2-20 **1**  
MIRL Rwy 8-26 **1**  
REIL Rwys 2, 8 and 26 **1**

FAF to MAP 4.8 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 4:48 | 3:12 | 2:24 | 1:55 | 1:36 |

|          |          |                    |           |                      |            |                      |                      |  |                     |  |  |
|----------|----------|--------------------|-----------|----------------------|------------|----------------------|----------------------|--|---------------------|--|--|
| CATEGORY | 11500    |                    | EHK R-278 |                      | BERYL<br>△ |                      | EHK VOR/DME<br>10800 |  | Remain within 10 NM |  |  |
|          | hdg 322° |                    | EHK 4.8   |                      | EHK 3.6    |                      | 3.07°<br>TCH 50      |  | 348°                |  |  |
|          | 177°     |                    | 7200      |                      | 168°       |                      | 8700                 |  |                     |  |  |
|          | 1.1 NM   |                    | 3.6 NM    |                      |            |                      |                      |  |                     |  |  |
| S-20*    |          | 6020-½ 415 (400-½) |           | 6020-¾ 415 (400-¾)   |            |                      |                      |  |                     |  |  |
| S-20     |          | 6300-½ 695 (700-½) |           | 6300-1½ 695 (700-1½) |            |                      |                      |  |                     |  |  |
| CIRCLING |          | 6300-1 678 (700-1) |           | 6300-2 678 (700-2)   |            | 6300-2¼ 678 (700-2¼) |                      |  |                     |  |  |

SW-4, 25 DEC 2025 to 22 JAN 2026

SW-4, 25 DEC 2025 to 22 JAN 2026