



WAAS CH 45931 W19A	APP CRS 188°	Rwy Ldg TDZE 1409 Apt Elev 1409
--	------------------------	---

RNAV (GPS) RWY 19
BEECH FACTORY (BEC)

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Wichita Dwight D Eisenhower Ntl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility and LNAV Cat C and D visibility ¼ mile and Circling Cat C and D visibility ¼ mile. Baro-VNAV NA with Wichita Dwight D Eisenhower Ntl altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct DENEY and hold.

AWOS-3PT 119.45	WICHITA APP CON 134.8 269.1	BEECH TOWER ★ 126.8 (CTAF) 0 313.6	GND CON 121.7	UNICOM 122.95
---------------------------	---------------------------------------	--	-------------------------	-------------------------

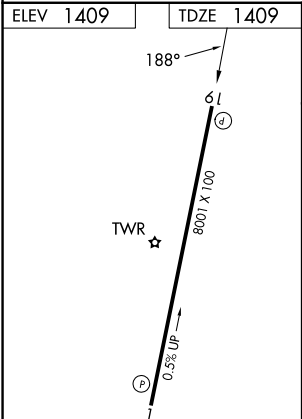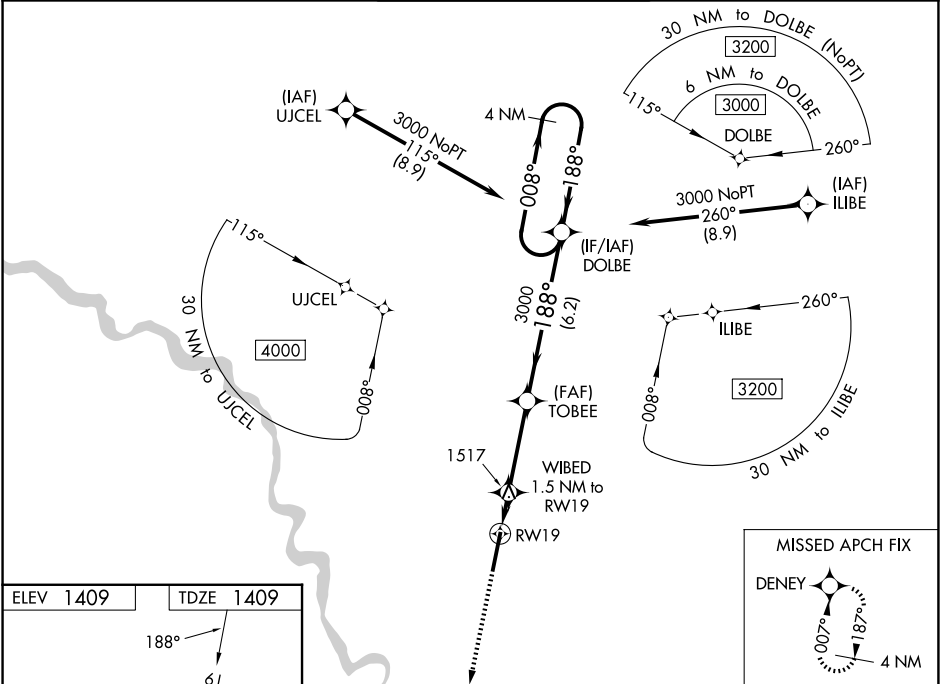

MIRL Rwy 1-19 **0**
REIL Rwy 1 and 19 **0**

NC-2, 25 DEC 2025 to 22 JAN 2026

NC-2, 25 DEC 2025 to 22 JAN 2026