
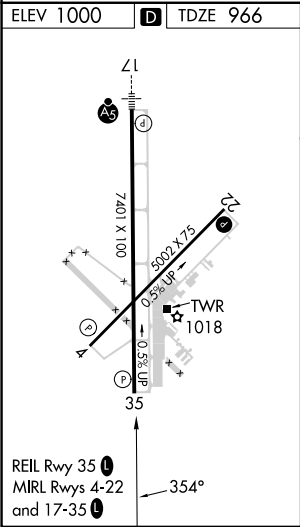


WAAS CH 42633 W35A	APP CRS 354°	Rwy Idg TDZE 7401 966 Apt Elev 1000
--	------------------------	---

RNAV (GPS) RWY 35
STILLWATER RGNL (SWO)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct ACOKO and hold.
⚠ Baro-VNAV and VDP NA when using Ponca City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Ponca City altimeter setting: increase LPV DA to 1246 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1336 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cats C/D ¼, and Circling visibility Cat D ¼ SM.	

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

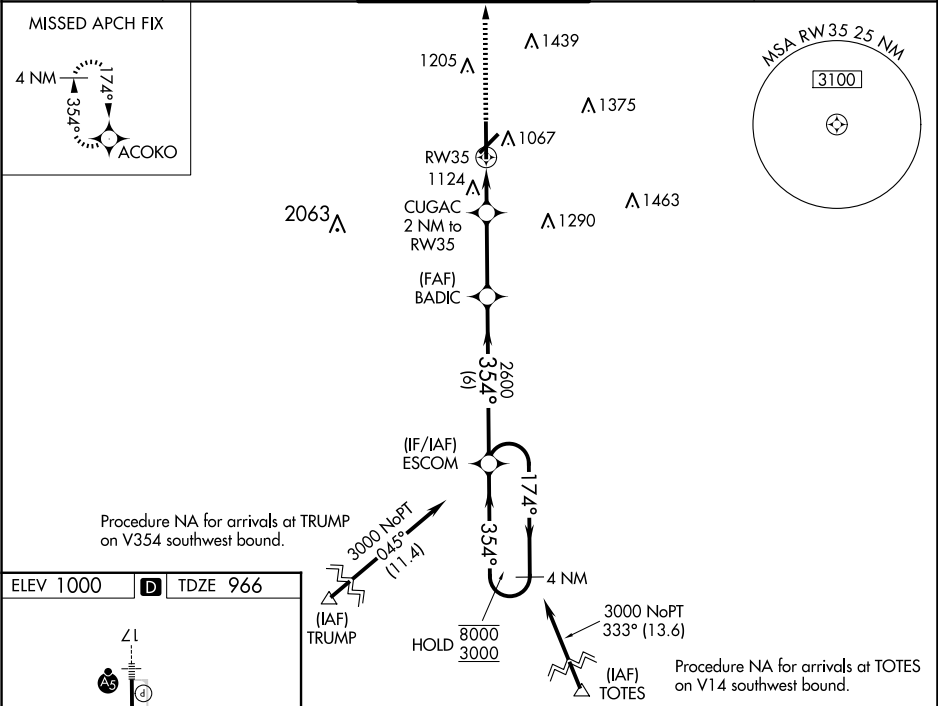

3000	ACOKO	CUGAC 2 NM to RW35	BADIC	ESCOM	4 NM Holding Pattern
3000	3000	1.2 NM to RW35	2600	354°	8000
3000	3000	1640	2600	354°	3000
3000	3000	1.2 NM	0.8 NM	3 NM	6 NM
CATEGORY	A	B	C	D	
LPV DA	1166-¾	200 (200-¾)			
LNAV/VNAV DA	1256-1	290 (300-1)			
LNAV MDA	1380-1	414 (400-1)	1380-1½	414 (400-1½)	
CIRCLING	1460-1 460 (500-1)	1480-1 480 (500-1)	1540-1½ 540 (600-1½)	1740-2¼ 740 (800-2¼)	

SC-1, 25 DEC 2025 to 22 JAN 2026

SC-1, 25 DEC 2025 to 22 JAN 2026