

LOC/DME	I-ALN	APP CRS	Rwy Ldg	8099
108.5		294°	TDZE	531
Chan 22			Apt Elev	544

ILS or LOC RWY 29

ST LOUIS RGNL (ALN)

⚠


For inop ALS, increase WULIB fix minimums S-LOC 29 Cats C/D visibility to 1 SM.

MALSR


MISSED APPROACH:

Climb to 1000 then climbing right turn to 2200 on heading 310° and on TOY VORTAC R-322 to TOPAZ INT/TOY 16 DME and hold.

ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER★ 126.0 (CTAF) 239.0	GND CON 120.2	UNICOM 122.95
---------------	---------------------------------	---------------------------------------	------------------	------------------

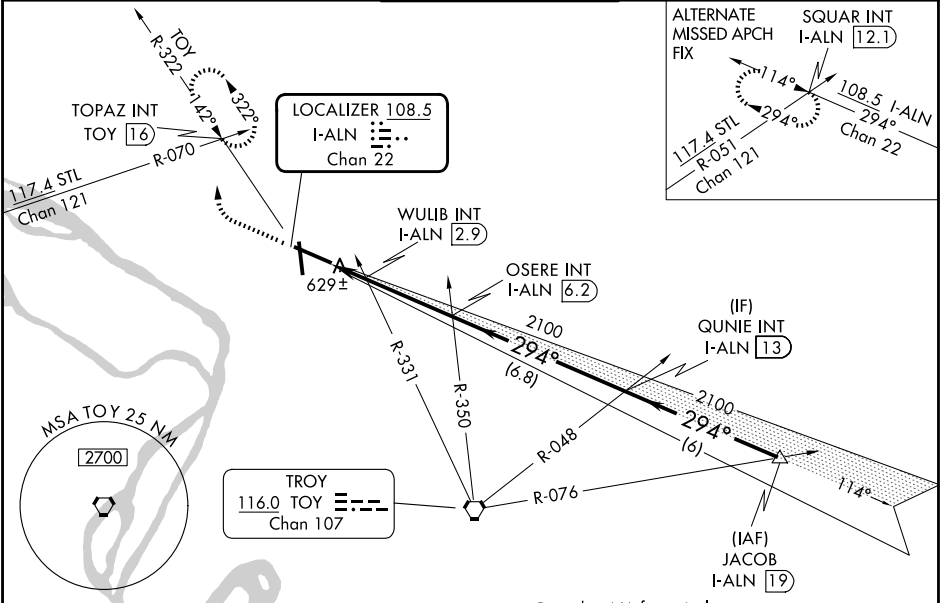

ELEV 544	D	TDZE 531
----------	---	----------

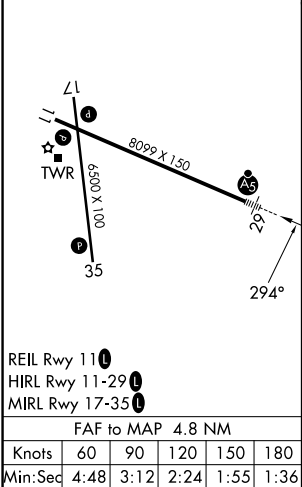

Procedure NA for arrivals at JACOB on V12 northeast bound.				
1000	2200	TOY R-322	TOPAZ INT	*LOC only.
	hdg 310°			
		OSERE INT I-ALN 6.2	QUNIE INT I-ALN 13	JACOB I-ALN 19
		WULIB INT I-ALN 2.9		
		I-ALN 1.5	2100	2100
		*980	2100	GS 3.00° TCH 55
		1.4 NM	3.3 NM	6.8 NM
CATEGORY	A	B	C	D
S-ILS 29	731-1/2 200 (200-1/2)			
S-LOC 29	980-1/2	449 (500-1/2)	980-7/8	449 (500-7/8)
CIRCLING	1000-1	456 (500-1)	1160-13/4	1200-2
			616 (700-13/4)	656 (700-2)
WULIB FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 29	880-1/2	349 (400-1/2)	880-5/8	349 (400-5/8)
CIRCLING	1000-1	456 (500-1)	1160-13/4	1200-2
			616 (700-13/4)	656 (700-2)